



Website



Facebook



Youtube



Instagram

**FENIX**  
LIGHTING FOR EXTREMES

**FENIXLIGHT LIMITED**

Tel: +86-755-29631163/83/93 Fax: +86-755-29631181  
Email: info@fenixlight.com www.fenixlight.com  
Address: 8/F, 2nd Building, DongFangMing Industrial Center,  
33rd District, Bao'an, Shenzhen 518133, China

Copy Right Jan. 2018 V1.0  
All Rights Reserved By Fenixlight Limited

**2018**  
PRODUCT CATALOG



TO BE THE  
BEST OUTDOOR SPORT  
LIGHTING BRAND  
IN THE WORLD

Fenix is a leading outdoor sport lighting brand as well as a China national high-tech enterprise, specializing in R&D, manufacturing and selling of outdoor sport lighting tools, including mid/high-end flashlights, headlamps, bicycle lights, camping lanterns as well as accessories. Fenix products are now being sold in more than 100 countries around the world.

Concentrating on innovative lighting technology and solutions, Fenix constantly develops LED lighting tools of high performance and high reliability, satisfying customers' pursuit of versatile illumination tools of high quality through exquisite craftsmanship. Fenix's products are widely used in the fields of outdoor sport, industry, law enforcement, military, edc (everyday carry), etc. As every product is released with excellent performance and reliable quality, Fenix has become known worldwide as a premium LED lighting brand.

Committed to the mission of innovating outdoor sport lighting and to make users' experience as pleasant as possible, Fenix aims to be the best outdoor sport lighting brand in the world.

## BRAND ORIGIN

As the great Chinese thinker Lu Xun said: "Improvement roots from dissatisfaction". The establishment of Fenix also roots from dissatisfaction. A group of young men, passionate about high quality illumination tools but unsatisfied with lighting products at that time, set out to make perfect flashlights, endeavoring to make the best flashlights in the world.

Adhering to the concept of "providing excellent products to customers through innovative design", Fenix has grown up to become a world-renowned outdoor sport lighting brand!

## BRAND CONNOTATION

The word Fenix roots from the English word phoenix [fi:niks], which in the Chinese translation means "phoenix" or "perfect thing", and the phoenix figure represents luck, blessedness and perfection in the Chinese culture.

## FENIX'S AWARDS

- Flashlight of 2005
- National High-Tech Enterprise
- The "Best in Show" Award in 2011 Outdoor Retailer Trade Show
- The LD20 got the title: "Best LED Flashlight"
- 2011 – 2013 "Zunlv Award" during annual election of Chinese outdoor industry awards
- The "Best of Show" Award – AFTA Trade Show 2013
- PD12 – ISPO "Award Winner" 2013/2014
- Named: The Best Cycling Gear of 2013 by Outside magazine
- CL20 – ISPO "Award Winner" 2015/2016
- "Editor's Choice" award by Outdoor Life magazine
- Single product "Brand of the Year" 2013
- BT20 – ISPO Asia Products "Gold Winner" Award 2012/2013
- Silver Prize in Asia Outdoor Industry Awards
- Named "Best Bargain" by Backpacker magazine
- Silver Prize in Chinese Outdoor Gear Award
- Named as one of the "Top 10 Travel Gadgets under \$50" by New York Times newspaper
- BC30R – Silver Award in Asia Outdoor Industry Awards; ISPO Asia Products "Gold Winner" Award 2015/2016
- CL25R—ISPO(Asia) Award Gold Winner
- HL10 2016—ISPO Global Product Winner
- TK72R won the Red Dot Award: Product Design 2017



|                        |   |    |
|------------------------|---|----|
| <b>TK series</b>       | Tough and powerful flashlights            | 7  |
| <b>PD series</b>       | Portable and high-intensity flashlights   | 22 |
| <b>LD series</b>       | Professional outdoor flashlights          | 29 |
| <b>E series</b>        | Outdoor flashlights                       | 35 |
| <b>RC/UC series</b>    | High-performance rechargeable flashlights | 49 |
| <b>FD series</b>       | Adjustable focus lights                   | 43 |
| <b>SD series</b>       | Underwater sport lights                   | 57 |
| <b>MC series</b>       | Angle lights                              | 41 |
| <b>HP series</b>       | High-performance separated headlamps      | 61 |
| <b>HM series</b>       | High-performance integrated headlamps     | 65 |
| <b>HL series</b>       | Lightweight outdoor headlamps             | 69 |
| <b>Bicycle light</b>   |   | 75 |
| <b>Camping lantern</b> |   | 83 |
| <b>Accessories</b>     |   | 91 |

## HIGH PERFORMANCE

Fenix utilizes the most advanced, world-class LED's with a lifespan of 50,000 hours, leading the trend in the LED industry and staying up to date with development in the LED industry. Owing to the accumulative experience of the diligent R&D team, Fenix is able to make the most of high photoelectric conversion efficiency, to have limited electric energy transformed into light energy, plus the choice of professional ultra-clear glass lens with anti-reflective coating, so that each spectral LED is effectively emitted. Additionally, outstanding constant current circuitry highlights Fenix's products, meaning a constant bright light with no flickering as the batteries discharge.

Digital regulation, constant brightness

Constant current circuitry

## EXQUISITE WORKMANSHIP

The application of advanced LED's and optical devices provide the foundation of manufacturing high-performance products. The critical fact that Fenix is greatly favored comes from manufacturing excellence and quality requirements. Fenix insists on aircraft-grade aluminum material to be produced by computerized numerical control (CNC) machinery, and premium Type III hard-anodized anti-abrasive finishing ensures Fenix products are sturdy and durable. Furthermore, exterior structure and surface processing is not the only and end result. Fenix commits to excellence also in circuit design, an independent yet advanced SMT product line, CNC product line and oxygen installation, which all ensure that every product is refined internally as well as externally.

## HIGH RELIABILITY

High-efficiency optical system

Fenix abides by the ISO9001 quality control system, which strictly supervises material selection, product manufacturing and quality inspection. As a member of PLATO, Fenix always sticks with professional inspection equipment and conducts every test in accordance with ANSI standards. Reliable structure design empowers Fenix lighting tools with great heat dissipation, extra strong dust resistance and waterproof capability to face various environments. Most of Fenix's products are waterproof to IPX8 standard; the diving flashlight is even waterproof to 100 meters deep.

Utilizing the latest LED

## PROMINENT OPTICAL SYSTEM

Sparing no efforts in meeting different environmental conditions, Fenix focuses on light color and light spot design, thus making every Fenix product balanced in terms of output, distance and beam angle, and reliable enough for various demanding applications. Fenix continues searching for a breakthrough - some products have orange-peel reflectors for ideal lighting efficacy; some have dual light sources to allow for spot- and floodlight needs; some even have composite reflectors for choosing multiple light colors. Fenix bicycle lights feature Dual Distance Beam System which is greatly favored by users and has received major industry awards.

Waterproof to IPX8 standard

Aircraft-grade aluminum



## UNREMITTING INNOVATION

It is deeply believed that innovation is the source of the ongoing progress and development of the Fenix brand. On the one hand, Fenix has exploited the camping lantern, a new product line which enriches Fenix as an all-around outdoor lighting brand. On the other hand, Fenix is committed to developing and introducing new techniques, dedicated to pleasing illumination experience and user-friendliness. The four-proofing headlamps even lead the trend in high-performance headlamps, and the characteristic cold-resistant camping lantern act tough in harsh environments.

# ADVANCED LIGHTING TECHNOLOGY

## HIKING

For a night of hiking, lightweight lighting tools are usually sufficient for common users. A long battery life and up close illumination are bonus points. For team leaders though, this kind of flashlight is not suitable. For them lighting tools with ultra-high output and far-reaching beam are more important than long duration, because they always have to plan and "read" the road ahead.

**Some recommended Fenix models:** PD35,LD22,LD12,E20,E12,UC30,RC09,HL30,HL26R,HL23,HL16,HL10

## CAMPING

Generally a high output lighting tool is not required for camping activities. A useful light would be one with a flood beam capable of lighting a large area for a long time, thus a lantern that can run all night without the need of a battery replacement would be considered ideal, without being too expensive.

**Some recommended Fenix models:** CL30R,CL25R,CL20R,CL09,CL05,CP30R,TK47UE

## CLIMBING

When climbing, a lighting tool with a soft flood beam is really helpful, especially when rock climbing or in snowy environments. Better color rendering makes for better user experience. For higher altitude climbing a cold-resistant lighting tool is particularly important – not only for better reliability, but also to maintain a longer duration of light.

**Some recommended Fenix models:** HL60R,HL55,HM50R,HL40R,HL32R,HL30,HP30R,HP25R,HP15UE

## RUNNING

For long distance cross-country running, runners prefer a lightweight headlamp with a long output duration which gives a good flood beam immediately around and in front, but in exceptional circumstances higher output lights with caution indication are also necessary. For those who enjoy leisurely urban night running, safety is of utmost importance, so choose a reliable tool as companion.

**Some recommended Fenix models:** HL30,HL26R,HL15,HL12R,HL10,HL05,HM50R

## CYCLING

High speed cross-country cycling requires a bicycle light with high output, combined with long-distance visibility and up close illumination, while at the same time considering long duration. For road riding with better and brighter light conditions, an economical bicycle light with fast and convenient dismounting are better than those with a higher output.

**Some recommended Fenix models:** BC30R,BC30,BC21R,BT30R

## HUNTING

A flashlight used for hunting should have a high output with a spotlight to ensure optimal beam distance, but because the light will be used only occasionally while hunting, a long runtime is not a huge requirement. Generally a hunting flashlight will need accessories that can absorb the recoil of a gun. Lights preferred for hunting are those that are equipped with red lights, or where a red filter can be added.

**Some recommended Fenix models:** TK32,TK25R&B,TK25IR,TK16,TK15UE,FD41,FD30,PD35TAC

## FISHING

While fishing, lighting tools will also be used only occasionally, thus long duration is not important. Fish are usually attracted by blue light, so lighting tools with blue lights are made for fishing.

**Some recommended Fenix models:** HP25R,HP15UE,HL60R,HL30,HL12R,TK25 R&B

## SEARCHING

Lighting tools for searching will demand high output and ultra-long beam distance, but these lighting tools are also burdened with larger volume and larger weight. Both these factors though, are secondary to the high performance of these lighting tools

**Some recommended Fenix models:** RC40,UC52,TK75,TK72R,TK65R,TK47,TK47UE,TK35,TK32,FD65,HP30R,HP25R

# LIGHTING FOR EXTREMES

## EMERGENCY RESCUE

Nowadays, people (personal and families) pay more attention to emergency lighting tools, let alone those professional security organizations that need high-performance lighting tools. During emergency rescue operations, readily accessible batteries like AA and CR123A really matter, so lighting tools compatible with these kinds of batteries are greatly preferred.

**Some recommended Fenix models:** LD41,LD22,FD45,FD20,E20,PD35,PD25,RC20,UC35,RC09,SE10

## LAW ENFORCEMENT/ TACTICAL

First and foremost, high-output spotlights and far-reaching beams are indispensable features for flashlights used for law enforcement and tactical operations. Besides that, certain unique tactical features cannot be neglected, such as tactical switches, strike crown bezels, grip rings and strobe functions. Compatibility with other accessories used for tactical applications, like tactical flashlight rings, remote pressure switches and traffic wands, is also very important.

**Some recommended Fenix models:** TK25R&B,TK25IR,TK20R,TK16,TK15UE,TK09,PD35TAC,PD32,UC35,RC20,FD30

## SAFETY

For insuring your safety, the lighting tools you use should have high output, while some tactical requirements are a strike bezel and strobe function. Furthermore, this kind of lighting tool should be highly reliable in resisting dust, water and shocks, and should be tough enough to confront emergency conditions.

**Some recommended Fenix models:** TK65R,TK47,TK25IR,TK20R,TK16, TK15UE,RC20,UC35,PD35TAC

## CAVING

A tough lighting tool plays a significant role in caving activities, while at the same time being versatile with regards to output selection, in that low output protects night vision, while high output is needed to deal with complex cave conditions. Combining spot- and floodlight enables far as well as wide visibility, which are essential for cave exploration. Additional features that are needed are long battery duration, high waterproof ability and shock resistance.

**Some recommended Fenix models:** HP30R,HP25R,HL60R,HL55,HM50R,HL40R,TK47UE,TK35UE,LD41,FD65

## DIVING

Without doubt, a flashlight for diving needs to be totally waterproof, thereafter high reliability and high brightness. As for battery life, that should be sufficient to exceed the duration of the planned dive. What's more, this diving flashlight must provide user-friendly operation underwater. Weight and size in this case are not of great importance due to the buoyancy provided by water.

**Some recommended Fenix models:** SD11, SD20

## INDUSTRIAL WORKPLACE

Rechargeable lighting products are usually warmly welcomed by industrial workers because of economic practicality. These rechargeable lights should feature multiple output selection and fast and convenient operation, while at the same time have high waterproofing capabilities, and be shock- and dust resistant. All these elements combined, react tough against the complex environments of industrial workplaces.

**Some recommended Fenix models:** SE10,RC20,RC09,UC30,FD20,HL60R,HL40R,HM50R,HP30R,HP25R,HP15UE

## PHOTOGRAPHY

Convenience and portability are essential for photography, where it is sometimes necessary to have manmade light, e. g. during nighttime outdoor photography. A helpful lighting tool brings about the best photographic works. For these photographic activities, features that are essential are neutral white lights for better color rendering, multiple output choices, and the flexibility to adjust between spot- and floodlight, plus the option to add colored filter adapters when needed.

**Some recommended Fenix models:** LD75C,TK35UE,TK25RB,E35UE,UC30,FD65,SD11,HL12R

## EDC

EDC (Everyday carry) as the name suggests, is designed to be carried with you all the time - to be a part of your daily life, thus this kind of lighting tool needs to be ultra-compact, and in critical emergency situations can help to save lives. Precise circuit design gives regulated low output with long lasting duration, and because a choice of output levels is not essential, two or three output selections should be sufficient. In cases of emergency, remember that this little buddy will always be by your side.

**Some recommended Fenix models:** E15,E12,E05,E01,UC02SS,UC02,UC01,LD12,LD09,RC09,RC05,HL10,HL05



A person is seen from behind, holding a flashlight that illuminates a rocky mountain peak at night. The flashlight's beam is bright and focused on the peak, which is covered in green vegetation. The sky is dark with some clouds and a few stars. The person is wearing a dark jacket and is standing on a dirt path. The overall scene is a night-time outdoor setting.

# TK SERIES

Tough and powerful flashlights

Based on the design concept "(T)ank (K)ing of the battlefield, Fenix's TK series models enter with high output, extended reach, toughness and reliability, which not only satisfy your particular needs when hunting and searching, but is also an unmatched choice for policing, military activities and enforcing the law.

# TK75 2018 5100 LUMENS SUPER BRIGHT MULTIFUNCTIONAL FLASHLIGHT



NEW

**Battery:** 4\*18650  
**Size:** 185mm Length x 52.5mm Body diameter x 87.5mm Head diameter  
**Weight:** 575 grams (excluding batteries)

### ANSI/PLATO FL1

| MODE    | OUTPUT      | RUNTIME   | DISTANCE |
|---------|-------------|-----------|----------|
| TURBO   | 5100 Lumens | 2h 15min  | 850m     |
| HIGH II | 2000 Lumens | 3h        | 517m     |
| HIGH I  | 1000 Lumens | 6h        | 367m     |
| MED     | 450 Lumens  | 17h 45min | 257m     |
| LOW     | 150 Lumens  | 46h       | 147m     |
| ECO     | 50 Lumens   | 95h       | 85m      |
| STROBE  | 5100 Lumens | /         | /        |
| SOS     | 150 Lumens  | /         | /        |



- 5100 lumens
- 850m beam distance
- Micro USB charging battery holder
- Battery level indication
- Tripod socket
- Momentary on turbo
- Momentary on strobe
- IP68, underwater 2m

# TK72R 9000 LUMENS SUPER BRIGHT INTELLIGENT FLASHLIGHT



NEW

**Battery:** 7000mAh Li-ion battery pack  
**Size:** 156mm Length x 59mm Body diameter x 50mm Head diameter  
**Weight:** 412 grams (excluding battery)

### ANSI/PLATO FL1

| MODE   | OUTPUT      | RUNTIME | DISTANCE |
|--------|-------------|---------|----------|
| HIGH   | 9000 lumens | 50min   | 286m     |
| LOW    | 100 lumens  | 50h     | 31m      |
| STROBE | 4000 lumens | /       | /        |

- OLED display
- Micro USB charging
- USB discharging
- Inner waterproof charging port
- 7000mAh Li-ion battery pack
- Three ways of switching on
- Momentary on turbo
- IP68, underwater 2m

# TK65R 3200 LUMENS

## RECHARGEABLE SECURITY FLASHLIGHT

NEW



# TK47 1300 LUMENS

## DUAL-PURPOSE LONG-RANGE FLASHLIGHT




11



CREE XHP70 LED



Battery level indication



Micro USB fast charging




Inner waterproof charging port



Catapult action belt clip



5,000mAh Li-ion battery pack




IP68 underwater 2m

**Battery:** 5,000mAh/7.2V Li-ion battery pack  
**Size:** 270.5mm Length x 61.5mm Body diameter x 36.5mm Head diameter  
**Weight:** 418 grams (excluding battery)

### ANSI/PLATO FL1

| MODE   | OUTPUT      | RUNTIME   | DISTANCE |
|--------|-------------|-----------|----------|
| TURBO  | 3200 Lumens | 1h 45min  | 375m     |
| HIGH   | 1000 Lumens | 4h 55min  | 218m     |
| MED    | 400 Lumens  | 13h 10min | 138m     |
| LOW    | 150 Lumens  | 35h 45min | 83m      |
| ECO    | 30 Lumens   | 113h      | 37m      |
| STROBE | 3200 Lumens | /         | /        |
| SOS    | 400 Lumens  | /         | /        |



**Battery:** 2\*18650  
**Size:** 266.2mm Length x 61.5mm Body diameter x 28.6mm Head diameter  
**Weight:** 376 grams (excluding batteries)

### ANSI/PLATO FL1

| MODE        | OUTPUT      | RUNTIME   | DISTANCE |
|-------------|-------------|-----------|----------|
| TURBO       | 1300 Lumens | 1h 50min  | 700m     |
| HIGH        | 400 Lumens  | 7h 15min  | 412m     |
| MED         | 100 Lumens  | 40h       | 214m     |
| LOW         | 10 Lumens   | 220h      | 73m      |
| STROBE      | 1300 Lumens | /         | /        |
| WHITE LIGHT | 30 Lumens   | 43h 30min | *8m      |
| RED LIGHT   | 1.5 Lumens  | 150h      | /        |
| RED FLASH   | 1.5 Lumens  | /         | /        |
| RED SOS     | 1.5 Lumens  | /         | /        |

\*Tail light with a wide-range 8m beam diameter



12

# TK47 ULTIMATE EDITION

## 3200 LUMENS

### DUAL-PURPOSE HIGH-PERFORMANCE FLASHLIGHT



**Battery:** 2\*18650

**Size:** 266.2mm Length x 61.5mm Body diameter x 28.6mm Head diameter

**Weight:** 365 grams (excluding batteries)

#### ANSI/PLATO FL1

|      | MODE        | OUTPUT      | RUNTIME   | DISTANCE |
|------|-------------|-------------|-----------|----------|
| HEAD | TURBO       | 3200 Lumens | 1h        | 408m     |
|      | HIGH        | 1000 Lumens | 3h 20min  | 232m     |
|      | MED         | 350 Lumens  | 11h20min  | 130m     |
|      | LOW         | 100 Lumens  | 46h       | 69m      |
|      | ECO         | 20 Lumens   | 170h      | 31m      |
|      | STROBE      | 3200 Lumens | /         | /        |
| TAIL | WHITE LIGHT | 30 Lumens   | 43h 30min | *8m      |
|      | RED LIGHT   | 1.5 Lumens  | 150h      | /        |
|      | RED FLASH   | 1.5 Lumens  | /         | /        |
|      | RED SOS     | 1.5 Lumens  | /         | /        |


\*Tail light with a wide-range 8m beam diameter




3200 Lumens



Multifunctional tail light



Separately controlled head&tail lights



Lockout function



IP68 underwater 2m



# TK35 2018



1300 LUMENS

PORTABLE SUPER BRIGHT FLASHLIGHT

15




NEW

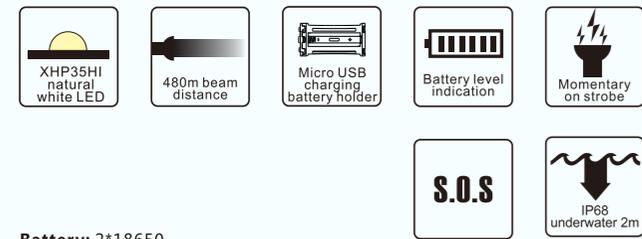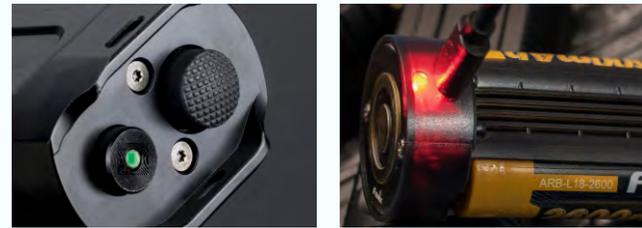

**Battery:** 2\*18650  
**Size:** 159.5mm Length x 43mm Body diameter x 48mm Head diameter  
**Weight:** 271 grams (excluding batteries)

| ANSI/PLATO FL1 |             |           |          |  |
|----------------|-------------|-----------|----------|--|
| MODE           | OUTPUT      | RUNTIME   | DISTANCE |  |
| TURBO          | 1300 Lumens | 3h 10min  | 480m     |  |
| HIGH           | 500 Lumens  | 5h 45min  | 294m     |  |
| MED            | 150 Lumens  | 21h 30min | 161m     |  |
| LOW            | 50 Lumens   | 68h 15min | 97m      |  |
| ECO            | 10 Lumens   | 235h      | 39m      |  |
| STROBE         | 1300 Lumens | /         | /        |  |
| SOS            | 50 Lumens   | /         | /        |  |

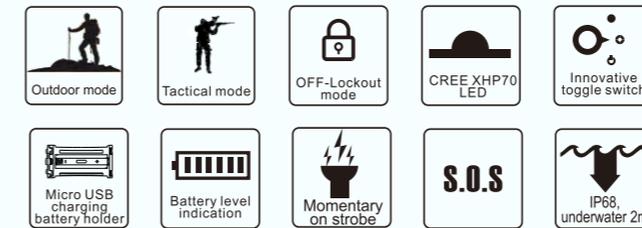

**Battery:** 2\*18650/4\*CR123A  
**Size:** 161mm Length x 50mm Head diameter  
**Weight:** 240 grams (excluding batteries)

| ANSI/PLATO FL1 |             |               |              |           |          |
|----------------|-------------|---------------|--------------|-----------|----------|
| MODE           | OUTPUT      | TACTICAL MODE | OUTDOOR MODE | RUNTIME   | DISTANCE |
| TURBO          | 3200 Lumens |               | ✓            | 1h 30min  | 300m     |
|                | 2000 Lumens | ✓             |              | 2h        | 233m     |
| HIGH           | 1000 Lumens |               | ✓            | 3h 40min  | 169m     |
| MED            | 350 Lumens  |               | ✓            | 10h 50min | 100m     |
| LOW            | 100 Lumens  |               | ✓            | 38h 40min | 55m      |
| ECO            | 20 Lumens   |               | ✓            | 152h      | 20m      |
| STROBE         | 3200 Lumens | ✓             | ✓            | /         | /        |
| SOS            | 100 Lumens  |               | ✓            | /         | /        |

# TK35 ULTIMATE EDITION 2018

3200 LUMENS

PORTABLE SUPER BRIGHT FLASHLIGHT



NEW

16

# TK32 1000 LUMENS

## LONG-RANGE HUNTING FLASHLIGHT

17



- White, Red, Green
- 422m beam distance
- Dual tail switches
- IP68, underwater 2m

Battery: 1\*18650/2\*CR123A  
 Size: 159mm Length x 25.4mm Body diameter x 52mm Head diameter  
 Weight: 175 grams (excluding battery)

| ANSI/PLATO FL1 |             |           |          |
|----------------|-------------|-----------|----------|
| MODE           | OUTPUT      | RUNTIME   | DISTANCE |
| TURBO          | 1000 Lumens | 1h 50min  | 422m     |
| HIGH           | 350 Lumens  | 4h 45min  | 245m     |
| MED            | 100 Lumens  | 15h 25min | 138m     |
| LOW            | 8 Lumens    | 170h      | 40m      |
| RED HIGH       | 105 Lumens  | 4h 15min  | 65m      |
| RED LOW        | 15 Lumens   | 65h       | 23m      |
| GREEN HIGH     | 165 Lumens  | 5h 30min  | 105m     |
| GREEN LOW      | 30 Lumens   | 40h       | 45m      |

# TK25 R&B Version 1000 LUMENS

## LONG-RANGE HUNTING FLASHLIGHT



- White, red and green light sources
- Rotary mode selection switching
- Tactical dual tail switches
- 225m beam distance
- Dual layer body
- IP68, underwater 2m

Battery: 1\*18650/2\*CR123A  
 Size: 142.6mm Length x 25.4mm Body diameter x 40mm Head diameter  
 Weight: 156.5 grams (excluding battery)

| ANSI/PLATO FL1 |             |          |          |
|----------------|-------------|----------|----------|
| MODE           | OUTPUT      | RUNTIME  | DISTANCE |
| TURBO          | 1000 Lumens | 2h       | 225m     |
| HIGH           | 300 Lumens  | 5h 20min | 124m     |
| MED            | 100 Lumens  | 22h20min | 75m      |
| LOW            | 15 Lumens   | 110h     | 25m      |
| RED HIGH       | 150 Lumens  | 7h30min  | 132m     |
| RED LOW        | 25 Lumens   | 40h      | 49m      |
| BLUE           | 60 Lumens   | 6h40min  | 41m      |
| STROBE         | 1000 Lumens | /        | /        |



# TK25 IR VERSION

## 1000 LUMENS

### DUAL LIGHTING SOURCES TACTICAL FLASHLIGHT



- White and infrared
- Tactical dual tailswitches
- Rotary mode selection switching
- Quick-release belt clip
- IP68 underwater 2m

**Battery:** 1\*18650/2\*CR123A  
**Size:** 142.6mm Length x 25.4mm Body diameter x 40mm Head diameter  
**Weight:** 156.5 grams (excluding battery)

| ANSI/PLATO FL1 |             |          |          |
|----------------|-------------|----------|----------|
| MODE           | OUTPUT      | RUNTIME  | DISTANCE |
| TURBO          | 1000 Lumens | 2h       | 225m     |
| HIGH           | 300 Lumens  | 5h 20min | 124m     |
| MED            | 100 Lumens  | 22h20min | 75m      |
| LOW            | 15 Lumens   | 110h     | 25m      |
| STROBE         | 1000 Lumens | /        | /        |

# TK25 Red VERSION

## 1000 LUMENS

### DUAL LIGHTING HUNTING FLASHLIGHT

NEW



- White and red
- Tactical dual tailswitches
- Rotary mode selection switching
- IP68 underwater 2m

**Battery:** 1\*18650/2\*CR123A  
**Size:** 142.6mm Length x 25.4mm Body diameter x 40mm Head diameter  
**Weight:** 156.5 grams (excluding battery)

| ANSI/PLATO FL1 |        |                  |          |          |
|----------------|--------|------------------|----------|----------|
|                | MODE   | OUTPUT           | RUNTIME  | DISTANCE |
| White Light    | TURBO  | 1000 Lumens      | 2h       | 225m     |
|                | HIGH   | 300 Lumens       | 5h 20min | 124m     |
|                | MED    | 100 Lumens       | 22h20min | 75m      |
|                | LOW    | 15 Lumens        | 110h     | 25m      |
|                | STROBE | 1000 Lumens      | /        | /        |
| Red Light      | HIGH   | 310Lumens/5500mW | 2h35min  | 200m     |
|                | MED    | 100Lumens/1200mW | 9h20min  | 105m     |
|                | LOW    | 10Lumens/90mW    | 100h     | 32m      |



Micro USB rechargeable  
 Inner waterproofing treatment



# TK20R 1000 LUMENS

## MICRO USB RECHARGEABLE TACTICAL FLASHLIGHT



- Micro USB charging
- Inner waterproof charging port
- 310m beam distance
- Boot-up indication
- Dual layer body
- IP68 underwater 2m

**Battery:** 1\*18650/2\*CR123A  
**Size:** 151.5mm Length x 25mm Body diameter x 34mm Head diameter  
**Weight:** 141 grams (excluding battery)

| ANSI/PLATO FL1 |             |          |           |          |
|----------------|-------------|----------|-----------|----------|
| MODE           | OUTPUT      | RUNTIME  |           | DISTANCE |
|                |             | 3500mAh  | 2900mAh   |          |
| TURBO          | 1000 Lumens | 2h       | 1h 40min  | 310m     |
| HIGH           | 350 Lumens  | 4h 20min | 4h        | 193m     |
| MED            | 150 Lumens  | 11h      | 10h 30min | 126m     |
| LOW            | 10 Lumens   | 160h     | 135h      | 31m      |
| STROBE         | 1000 Lumens | /        | /         | /        |

# TK16 1000 LUMENS

## HIGH-PERFORMANCE TACTICAL FLASHLIGHT



**Battery:** 1\*18650/2\*CR123A  
**Size:** 140mm Length x 25mm Body diameter x 34mm Head diameter  
**Weight:** 122 grams (excluding battery)

| ANSI/PLATO FL1 |             |          |          |
|----------------|-------------|----------|----------|
| MODE           | OUTPUT      | RUNTIME  | DISTANCE |
| TURBO          | 1000 Lumens | 1h 10min | 240m     |
| HIGH           | 400 Lumens  | 3h 25min | 155m     |
| MED            | 150 Lumens  | 10h      | 97m      |
| LOW            | 10 Lumens   | 150h     | 23m      |
| STROBE         | 1000 Lumens | /        | /        |

# TK09 900 LUMENS


## FAR-REACHING TACTICAL FLASHLIGHT



**Battery:** 1\*18650/2\*CR123A  
**Size:** 130mm Length x 25.4mm Body diameter x 34mm Head diameter  
**Weight:** 105 grams (excluding battery)

| ANSI/PLATO FL1 |            |          |          |
|----------------|------------|----------|----------|
| MODE           | OUTPUT     | RUNTIME  | DISTANCE |
| HIGH           | 900 Lumens | 1h 25min | 310m     |
| MED            | 450 Lumens | 4h 55min | 218m     |
| LOW            | 50 Lumens  | 37h      | 72m      |
| STROBE         | 900 Lumens | /        | /        |

# TK15 ULTIMATE EDITION 1000 LUMENS



**Battery:** 1\*18650/2\*CR123A  
**Size:** 142.5mm Length x 25.4mm Body diameter x 34mm Head diameter  
**Weight:** 141 grams (excluding battery)

| ANSI/PLATO FL1 |             |           |          |
|----------------|-------------|-----------|----------|
| MODE           | OUTPUT      | RUNTIME   | DISTANCE |
| TURBO          | 1000 Lumens | 2h        | 325m     |
| HIGH           | 350 Lumens  | 4h 20min  | 194m     |
| MED            | 150 Lumens  | 11h 30min | 125m     |
| LOW            | 10 Lumens   | 135h      | 31m      |
| STROBE         | 1000 Lumens | /         | /        |



# PD SERIES

Portable, high-intensity flashlights

Fenix PD Series flashlights provide incredible performance with their exquisite designs and optimum size-to-output ratios. Whether they are for outdoor sports lighting or military and law enforcement, the PD Series models are your reliable partners anytime and anywhere.





Convenient USB charging  
Inner waterproofing treatment



Charging

Fully charged



Fitted with quad core  
Cree XHP70 LED



Included 26650  
rechargeable  
Li-ion power  
battery

# PD35 V2.0

1000 Lumens






## HIGH-PERFORMANCE PORTABLE FLASHLIGHT



# PD40R

3000 Lumens

## MICRO USB RECHARGEABLE PORTABLE FLASHLIGHT




**Battery:** 1\*26650 power battery  
**Size:** 138.5mm Length x 34mm Body diameter x 30mm Head diameter  
**Weight:** 126 grams (excluding battery)

| ANSI/PLATO FL1 |             |           |          |
|----------------|-------------|-----------|----------|
| MODE           | OUTPUT      | RUNTIME   | DISTANCE |
| TURBO          | 3000 Lumens | 12min     | 200m     |
| HIGH           | 1000 Lumens | 2h        | 123m     |
| MED            | 350 Lumens  | 7h 25min  | 68m      |
| LOW            | 100 Lumens  | 21h 15min | 39m      |
| ECO            | 20 Lumens   | 55h       | 16m      |
| STROBE         | 1000 Lumens | /         | /        |
| SOS            | 350 Lumens  | /         | /        |



NEW



**Battery:** 1\*18650/2\*CR123A  
**Size:** 139mm Length x 25.4mm Diameter x 23mm Body diameter  
**Weight:** 87 grams (excluding battery)

| ANSI/PLATO FL1 |             |           |          |
|----------------|-------------|-----------|----------|
| MODE           | OUTPUT      | RUNTIME   | DISTANCE |
| TURBO          | 1000 Lumens | 2h50min   | 250m     |
| HIGH           | 350 Lumens  | 5h10min   | 157m     |
| MED            | 150 Lumens  | 12h 25min | 103m     |
| LOW            | 50 Lumens   | 29h 30min | 60m      |
| ECO            | 3 Lumens    | 430h      | 13m      |
| STROBE         | 1000 Lumens | /         | /        |

# PD35 TAC

1000 Lumens  
HIGH-PERFORMANCE TACTICAL FLASHLIGHT




Battery: 1\*18650/2\*CR123A  
Size: 137mm Length x 25.4mm Diameter  
Weight: 89 grams (excluding battery)

| ANSI/PLATO FL1 |             |          |         |           |          |
|----------------|-------------|----------|---------|-----------|----------|
| MODE           | OUTPUT      | TACTICAL | OUTDOOR | RUNTIME   | DISTANCE |
| TURBO          | 1000 Lumens | ✓        | ✓       | 1h 10min  | 200m     |
| HIGH           | 500 Lumens  |          | ✓       | 2h 55min  | 135m     |
| MED            | 200 Lumens  |          | ✓       | 8h 30min  | 80m      |
| LOW            | 60 Lumens   | ✓        | ✓       | 29h 15min | 48m      |
| ECO            | 8 Lumens    |          | ✓       | 140h      | 17m      |
| STROBE         | 1000 Lumens | ✓        | ✓       | /         | /        |



# PD32 900 Lumens

HIGH-PERFORMANCE POCKET FLASHLIGHT




Battery: 1\*18650/2\*CR123A  
Size: 129.5mm Length x 22.6mm Body diameter x 24mm Head diameter  
Weight: 77 grams (excluding battery)

| ANSI/PLATO FL1 |            |           |          |
|----------------|------------|-----------|----------|
| MODE           | OUTPUT     | RUNTIME   | DISTANCE |
| TURBO          | 900 Lumens | 1h 55min  | 240m     |
| HIGH           | 400 Lumens | 4h        | 156m     |
| MED            | 150 Lumens | 10h 25min | 97m      |
| LOW            | 50 Lumens  | 37h 5min  | 52m      |
| ECO            | 5 Lumens   | 260h      | 13m      |
| STROBE         | 900 Lumens | /         | /        |
| SOS            | 50 Lumens  | /         | /        |

# PD25 550 Lumens

HIGH-PERFORMANCE POCKET FLASHLIGHT




Battery: 1\*16340/1\*CR123A  
Size: 93mm Length x 21.5mm Diameter  
Weight: 47 grams (excluding battery)

| ANSI/PLATO FL1 |            |            |          |          |          |       |
|----------------|------------|------------|----------|----------|----------|-------|
| MODE           | OUTPUT     |            | RUNTIME  |          | DISTANCE |       |
|                | CR123A     | 16340      | CR123A   | 16340    | CR123A   | 16340 |
| TURBO          | 400 lumens | 550 lumens | 1h 10min | 35min    | 116m     | 130m  |
| HIGH           | 150 lumens | 150 lumens | 3h 15min | 2h 25min |          | 71m   |
| MED            | 50 lumens  | 50 lumens  | 9h 5min  | 7h 10min |          | 41m   |
| LOW            | 5 lumens   | 5 lumens   | 100h     | 53h      |          | 13m   |
| STROBE         | 400 lumens | 550 lumens | /        | /        |          | /     |

# LD SERIES

## Professional outdoor flashlights

Oriented towards the outdoor professional, Fenix develops its LD series flashlight with exquisite and compact design, which lessens the volume and reduces weight to the largest extent. With various output levels and a flashing function, the Fenix LD models can satisfy your various lighting needs, making them the preferred quality lighting devices for those highly difficult professional outdoor sport activities.

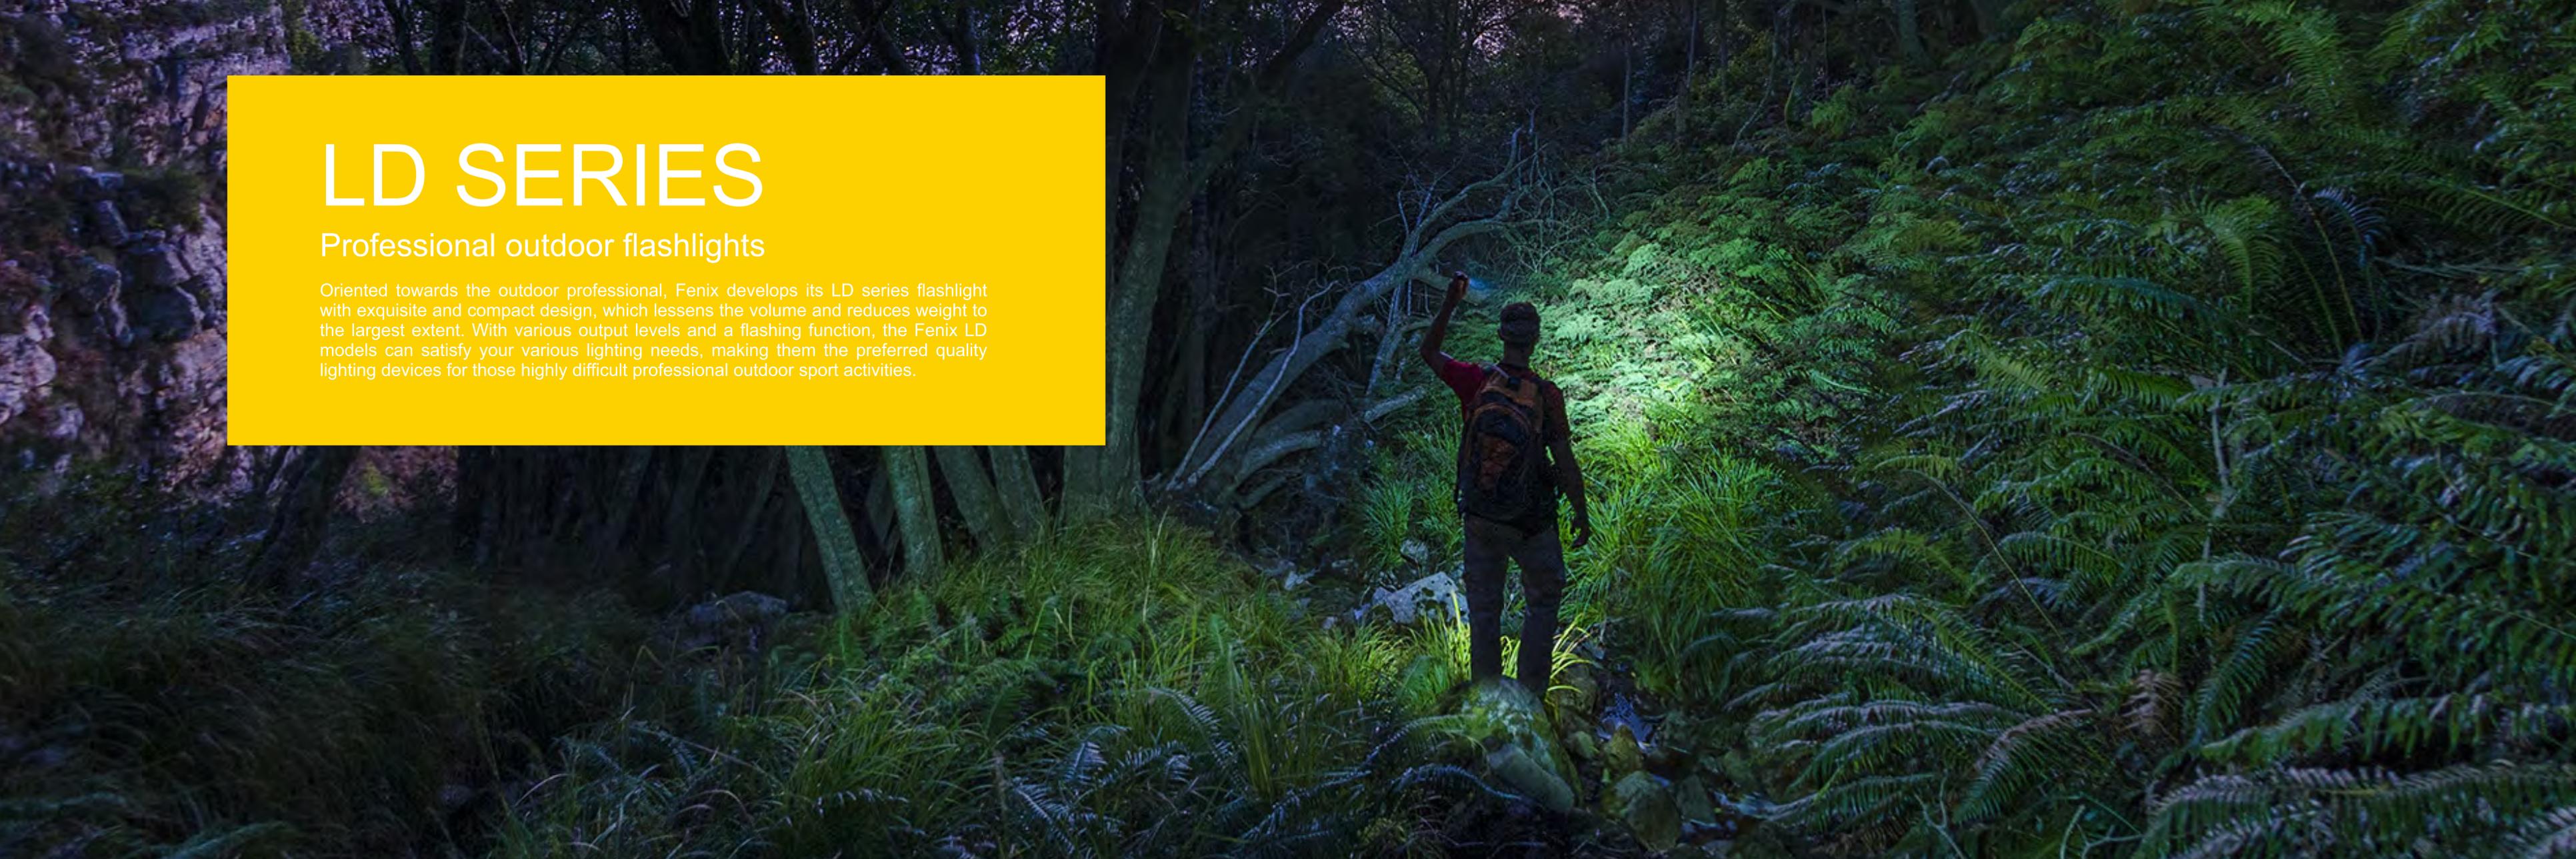


# LD75C 4200 Lumens

PORTABLE SUPER BRIGHT MULTI-COLORED FLASHLIGHT



Battery: 4\*18650/8\*CR123A  
 Size: 158mm Length x 52mm Body diameter x 74mm Head diameter  
 Weight: 430 grams (excluding batteries)

| ANSI/PLATO FL1    |             |            |          |
|-------------------|-------------|------------|----------|
| MODE              | OUTPUT      | RUNTIME    | DISTANCE |
| TURBO             | 4000 Lumens | 1h 30min   | 490m     |
| HIGH              | 1800 Lumens | 3h         | 296m     |
| MED               | 600 Lumens  | 11h        | 176m     |
| LOW               | 200 Lumens  | 35h        | 100m     |
| ECO               | 40 Lumens   | 175h       | 45m      |
| STROBE            | 4000 Lumens | /          | /        |
| Multi-colored LED | RED         | 140 Lumens | 14h      |
|                   | GREEN       | 190 Lumens | 11h      |
|                   | BLUE        | 45 Lumens  | 11h      |
|                   | WHITE       | 200 Lumens | 11h      |



# LD41 960 Lumens

HIGH-PERFORMANCE 4AA OUTDOOR FLASHLIGHT




Battery: 4\*AA  
 Size: 175mm Length x 40mm Diameter  
 Weight: 190 grams (excluding batteries)

| ANSI/PLATO FL1 |            |          |          |
|----------------|------------|----------|----------|
| MODE           | OUTPUT     | RUNTIME  | DISTANCE |
| TURBO          | 960 Lumens | 1h       | 300m     |
| HIGH           | 400 Lumens | 2h 25min | 193m     |
| MED            | 150 Lumens | 9h 30min | 118m     |
| LOW            | 6 Lumens   | 200h     | 23m      |
| STROBE         | 960 Lumens | /        | /        |
| SOS            | 150 Lumens | /        | /        |

# LD22 300 Lumens

HIGH-PERFORMANCE 2AA OUTDOOR FLASHLIGHT



Battery: 2\*AA  
 Size: 155mm Length x 21.5mm Diameter  
 Weight: 72 grams (excluding batteries)

| ANSI/PLATO FL1 |            |           |          |          |
|----------------|------------|-----------|----------|----------|
| MODE           | OUTPUT     | RUNTIME   |          | DISTANCE |
|                |            | Alkaline  | Ni-MH    |          |
| TURBO          | 300 Lumens | 40min     | 1h 25min | 120m     |
| HIGH           | 100 Lumens | 5h 5min   | 7h 10min | 71m      |
| MED            | 30 Lumens  | 22h 30min | 25h 5min | 40m      |
| LOW            | 5 Lumens   | 90h       | 100h     | 14m      |
| STROBE         | 300 Lumens | /         | /        | /        |
| SOS            | 100 Lumens | /         | /        | /        |

# LD09 220 Lumens

## PORTABLE AA OUTDOOR FLASHLIGHT




**Battery:** 1\*AA/1\*14500  
**Size:** 94mm Length x 19mm Diameter  
**Weight:** 35 grams (excluding battery)

| ANSI/PLATO FL1 |                |            |          |          |          |                |       |
|----------------|----------------|------------|----------|----------|----------|----------------|-------|
| MODE           | OUTPUT         |            | RUNTIME  |          |          | DISTANCE       |       |
|                | Alkaline/Ni-MH | 14500      | Ni-MH    | Alkaline | 14500    | Alkaline/Ni-MH | 14500 |
| HIGH           | 130 Lumens     | 220 Lumens | 1h 45min | 50min    | 1h       | 99m            | 120m  |
| MED            | 50 Lumens      |            | 8h 5min  | 5h       | 5h 35min | 59m            |       |
| LOW            | 3 Lumens       |            | 70h      | 43h      | 58h      | 18m            |       |
| SOS            | 50 Lumens      |            | /        | /        | /        | /              |       |

# LD02 100 Lumens

## COMPACT AAA OUTDOOR FLASHLIGHT



**Battery:** 1\*AAA  
**Size:** 76mm Length x 15mm Diameter  
**Weight:** 16 grams (excluding battery)

| ANSI/PLATO FL1 |            |           |          |          |
|----------------|------------|-----------|----------|----------|
| MODE           | OUTPUT     | RUNTIME   |          | DISTANCE |
|                |            | Ni-MH     | Alkaline |          |
| HIGH           | 100 Lumens | 45min     | 30min    | 45m      |
| MED            | 25 Lumens  | 4h 15min  | 4h 15min | 22m      |
| LOW            | 8 Lumens   | 14h 30min | 15h      | 12m      |

# LD12 320 Lumens



## PORTABLE HIGH-PERFORMANCE FLASHLIGHT



Tactical tail switch



Stainless steel side switch for convenient operation



Neutral white light    Tactical tail switch    Strobe    IP68, underwater 2m

| ANSI/PLATO FL1 |                |            |          |          |          |          |
|----------------|----------------|------------|----------|----------|----------|----------|
| MODE           | OUTPUT         |            | RUNTIME  |          |          | DISTANCE |
|                | Alkaline/Ni-MH | 14500      | Alkaline | Ni-MH    | 14500    |          |
| TURBO          | 150 Lumens     | 320 Lumens | 50min    | 1h 45min | 1h       | 94m/135m |
| HIGH           | 70 Lumens      |            | 3h       | 5h 40min | 3h 30min | 67m      |
| MED            | 30 Lumens      |            | 9h 40min | 13h      | 11h      | 45m      |
| LOW            | 5 Lumens       |            | 40h      | 60h      | 50h      | 18m      |
| STROBE         | 150 Lumens     | 320 Lumens | /        | /        | /        | /        |



**Battery:** 1\*14500/1\*AAA  
**Size:** 102.5mm Length x 20.5mm Body diameter x 21.5mm Head diameter  
**Weight:** 56 grams (excluding battery)

# E SERIES

## Outdoor flashlights

Adhering to the design concept of “Everyday carry + Easy to use”, Fenix develops the E series outdoor sport flashlights featuring simple and practical output levels, easy and fast operation, plus highly reliable design features such as water and impact resistance. The Fenix E series models are indispensable lighting devices for your outdoor sport activities and EDC.



# E35

ULTIMATE EDITION  
1000 Lumens  
HIGH-PERFORMANCE EDC FLASHLIGHT



# E25

ULTIMATE EDITION  
1000 Lumens  
HIGH-PERFORMANCE EDC FLASHLIGHT



# E20

265 Lumens  
HIGH-PERFORMANCE EDC FLASHLIGHT



# E15

450 Lumens  
MINI KEY CHAIN FLASHLIGHT



37

- Dual switches control
- Five output levels
- Lockout function
- Strobe
- S.O.S
- IP68, underwater 2m

- Dual switches control
- Five output levels
- Lockout function
- Strobe
- S.O.S
- IP68, underwater 2m

- 210m beam distance
- Four output levels
- One switch control
- IP68, underwater 2m

- 16340/CR123A available
- Four output levels
- Rotary output selection
- IP68, underwater 2m

Battery: 1\*18650/2\*CR123A  
Size: 122mm Length x 24mm Diameter  
Weight: 72 grams (excluding battery)

Battery: 2\*14500/2\*AA  
Size: 161mm Length x 19.6mm Body diameter x 25.4 Head diameter  
Weight: 87 grams (excluding battery)

Battery: 2\*AA  
Size: 154mm Length x 21mm Body diameter x 25.4mm Head diameter  
Weight: 90 grams (excluding batteries)

Battery: 1\*16340/1\*CR123A  
Size: 64.8mm Length x 19mm Body diameter x 22mm Head diameter  
Weight: 29 grams (excluding battery)

| ANSI/PLATO FL1 |             |           |          |
|----------------|-------------|-----------|----------|
| MODE           | OUTPUT      | RUNTIME   | DISTANCE |
| TURBO          | 1000 Lumens | 1h 50min  | 160m     |
| HIGH           | 450 Lumens  | 4h        | 106m     |
| MED            | 150 Lumens  | 11h 50min | 61m      |
| LOW            | 50 Lumens   | 42h 30min | 37m      |
| ECO            | 8 Lumens    | 150h      | 14m      |
| STROBE         | 1000 Lumens | /         | /        |
| SOS            | 150 Lumens  | /         | /        |


| ANSI/PLATO FL1 |                |             |           |           |           |          |
|----------------|----------------|-------------|-----------|-----------|-----------|----------|
| MODE           | OUTPUT         |             | RUNTIME   |           |           | DISTANCE |
|                | Alkaline/Ni-MH | 14500       | Ni-MH     | Alkaline  | 14500     |          |
| TURBO          | /              | 1000 Lumens | /         | /         | 50min     | 200m     |
| HIGH           | 350 Lumens     |             | 1h 30min  | 50min     | 2h 15min  | 112m     |
| MED            | 160 Lumens     |             | 4h 35min  | 2h 10min  | 5h 5min   | 76m      |
| LOW            | 50 Lumens      |             | 13h 25min | 13h 10min | 16h 30min | 43m      |
| ECO            | 5 Lumens       |             | 100h      | 90h       | 95h       | 13m      |
| STROBE         | 350 Lumens     | 1000 Lumens | /         | /         | /         | /        |
| SOS            | 160 Lumens     |             | /         | /         | /         | /        |

| ANSI/PLATO FL1 |            |           |          |          |
|----------------|------------|-----------|----------|----------|
| MODE           | OUTPUT     | RUNTIME   |          | DISTANCE |
|                |            | Ni-MH     | Alkaline |          |
| TURBO          | 265 Lumens | 1h 20min  | 30min    | 210m     |
| HIGH           | 95 Lumens  | 6h 45min  | 4h 45min | 118m     |
| MED            | 35 Lumens  | 22h 35min | 20h 5min | 68m      |
| LOW            | 8 Lumens   | 75h       | 75h      | 27m      |

| ANSI/PLATO FL1 |            |            |          |           |          |        |
|----------------|------------|------------|----------|-----------|----------|--------|
| MODE           | OUTPUT     |            | RUNTIME  |           | DISTANCE |        |
|                | 16340      | CR123A     | 16340    | CR123A    | 16340    | CR123A |
| TURBO          | 450 Lumens | 270 Lumens | 55 min   | 1h 35min  | 132m     | 91m    |
| HIGH           | 110 Lumens |            | 3h 15min | 5h 5min   |          | 58m    |
| MED            | 50 Lumens  |            | 9h 25min | 12h 30min |          | 38m    |
| LOW            | 8 Lumens   |            | 40h      | 72h       |          | 15m    |

# E12 130 Lumens

## PORTABLE EDC FLASHLIGHT



Three output levels



One switch control



One AA battery



IP68, underwater 2m

Battery: 1\*AA  
 Size: 90mm Length x 19mm Diameter  
 Weight: 28.5 grams (excluding battery)

### ANSI/PLATO FL1


| MODE | OUTPUT     | RUNTIME  |          | DISTANCE |
|------|------------|----------|----------|----------|
|      |            | Ni-MH    | Alkaline |          |
| HIGH | 130 Lumens | 1h 30min | 1h       | 88m      |
| MED  | 50 Lumens  | 6h 30min | 3h 30min | 51m      |
| LOW  | 8 Lumens   | 40h      | 22h      | 19m      |

# E01 13 Lumens


## SUPER MINI KEY CHAIN FLASHLIGHT



Nichia LED



Digitally regulated output



IP68, underwater 2m

Battery: 1\*AAA  
 Size: 71mm Length x 14.2mm Diameter  
 Weight: 14 grams (excluding battery)


### ANSI/PLATO FL1

| OUTPUT    | RUNTIME   | DISTANCE |
|-----------|-----------|----------|
| 13 Lumens | 16h 30min | 21m      |




# E05 85 Lumens

## HIGH-PERFORMANCE EDC FLASHLIGHT



Total reflective lens



Three output levels



Rotary output selection



One AAA battery



IP68, underwater 2m

### ANSI/PLATO FL1

| MODE | OUTPUT    | RUNTIME   |          | DISTANCE |
|------|-----------|-----------|----------|----------|
|      |           | Ni-MH     | Alkaline |          |
| HIGH | 85 Lumens | 1h        | 45min    | 45m      |
| MED  | 25 Lumens | 4h 15min  | 4h 15min | 18m      |
| LOW  | 8 Lumens  | 15h 30min | 15h      | 8m       |

Battery: 1\*AAA  
 Size: 66.5mm Length x 15mm Diameter  
 Weight: 12.5 grams (excluding battery)

# MC SERIES



## Angle lights

This Fenix MC series is designed so you can alter the direction of the light beam by adjusting the angle of the light head. The MC series is more versatile than you may need or imagine, be that by hanging it from the attachment hook, hooking it somewhere by using the pocket clip, putting it down somewhere and angling the head to where you need the beam, or even using it as a handheld flashlight, and is perfect for outdoor activities like camping, hiking or mountaineering. It is also perfect for those emergency situations where stronger lights are not necessary, like rescuing or repairs.

# MC11

## 155 Lumens


### MULTIFUNCTIONAL ANGLE FLASHLIGHT



Adjusts the beam when needed with 90° adjustable head



**Battery:** 1\*AA  
**Size:** 99mm Length x 21.5mm Body diameter x 25mm Head diameter  
**Weight:** 64.8 grams (excluding battery)

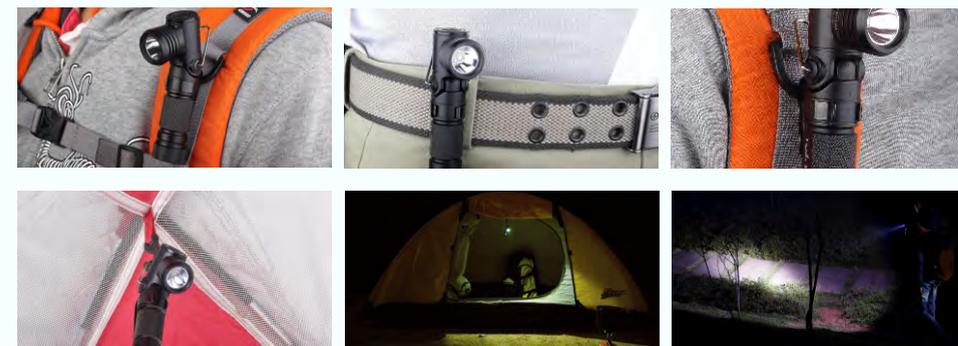

#### ANSI/PLATO FL1

| MODE  | OUTPUT     | RUNTIME  |          | DISTANCE |
|-------|------------|----------|----------|----------|
|       |            | Ni-MH    | Alkaline |          |
| BURST | 155 Lumens | /        | /        | 75m      |
| HIGH  | 105 Lumens | 2h 15min | 1h 40min | 65m      |
| MED   | 50 Lumens  | 6h       | 4h 45min | 46m      |
| LOW   | 3 Lumens   | 90h      | 100h     | 15m      |



# FD SERIES

## Adjustable focus lights

Rotating the head allows seamless transition between spotlight (for viewing at a distance) and floodlight (for up close illumination). Without doubt, Fenix FD Series is made for camping, caving, searching and photographing.



Super bright and far-reaching neutral white light



High-performance even and wide-range floodlight

## FD65 3800 Lumens SUPER BRIGHT FOCUSING FLASHLIGHT

NEW





Battery: 4\*18650

Size: 152.5mm Length x 50.5mm Body diameter x 61mm Head diameter

Weight: 431 grams (excluding batteries)

### ANSI/PLATO FL1

| MODE   | OUTPUT      | RUNTIME   | DISTANCE |       |
|--------|-------------|-----------|----------|-------|
|        |             |           | SPOT     | FLOOD |
| TURBO  | 3800 Lumens | 3h        | 410m     | 86m   |
| HIGH   | 1200 Lumens | 5h        | 230m     | 49m   |
| MED    | 400 Lumens  | 19h 40min | 131m     | 29m   |
| LOW    | 150 Lumens  | 40h 50min | 85m      | 19m   |
| ECO    | 50 Lumens   | 86h       | 52m      | 11m   |
| STROBE | 3800 Lumens | /         | /        | /     |
| SOS    | 150 Lumens  | /         | /        | /     |






## FD41 900 Lumens




### 360° FOCUSING TACTICAL FLASHLIGHT



**Battery:** 1\*18650/2\*CR123A  
**Size:** 146mm Length x 25.4mm Body diameter x 40mm Head diameter  
**Weight:** 160 grams (excluding battery)




| ANSI/PLATO FL1 |            |           |          |       |
|----------------|------------|-----------|----------|-------|
| MODE           | OUTPUT     | RUNTIME   | DISTANCE |       |
|                |            |           | SPOT     | FLOOD |
| TURBO          | 900 Lumens | 1h 40min  | 340m     | 47m   |
| HIGH           | 350 Lumens | 3h 50min  | 218m     | 30m   |
| MED            | 150 Lumens | 10h 15min | 141m     | 20m   |
| LOW            | 10 Lumens  | 150h      | 37m      | 6m    |
| STROBE         | 900 Lumens | /         | /        | /     |

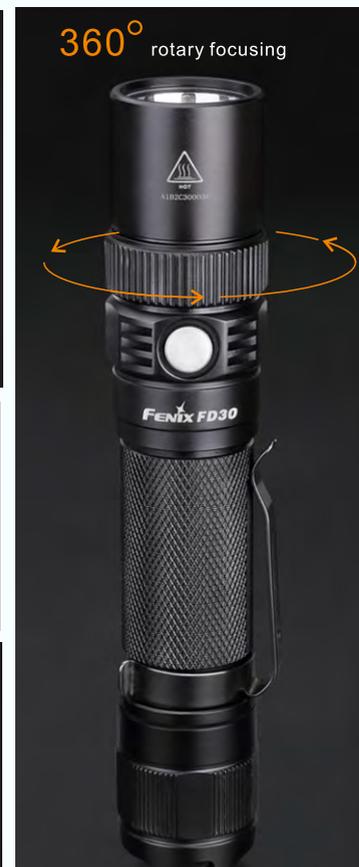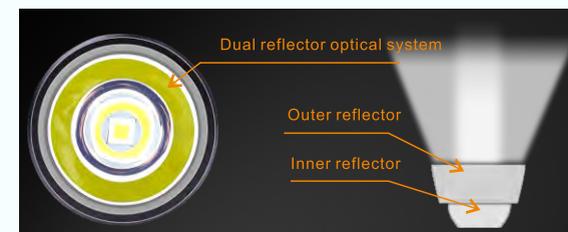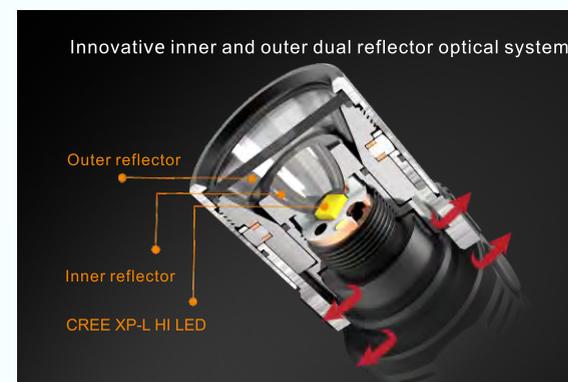

| ANSI/PLATO FL1 |            |           |          |       |
|----------------|------------|-----------|----------|-------|
| MODE           | OUTPUT     | RUNTIME   | DISTANCE |       |
|                |            |           | SPOT     | FLOOD |
| TURBO          | 900 Lumens | 2h        | 200m     | 67m   |
| HIGH           | 350 Lumens | 4h 30min  | 117m     | 43m   |
| MED            | 150 Lumens | 11h       | 77m      | 28m   |
| LOW            | 50 Lumens  | 40h 30min | 44m      | 16m   |
| ECO            | 8 Lumens   | 170h      | 17m      | 8m    |
| STROBE         | 900 Lumens | /         | /        | /     |

## FD30 900 Lumens

### 360° FOCUSING PORTABLE FLASHLIGHT





**Battery:** 1\*18650/2\*CR123A  
**Size:** 140.5mm Length x 23mm Body diameter x 25.4mm Head diameter  
**Weight:** 96 grams (excluding battery)

# FD45 900 Lumens

## 4AA FOCUSING FLASHLIGHT

NEW



**Battery:** 4\*AA  
**Size:** 121.2mm Length x 39mm Body diameter x 40mm Head diameter  
**Weight:** 208 grams (excluding batteries)

### ANSI/PLATO FL1

| MODE   | OUTPUT     | RUNTIME   | DISTANCE |       |
|--------|------------|-----------|----------|-------|
|        |            |           | SPOT     | FLOOD |
| TURBO  | 900 Lumens | 1h 30min  | 333m     | 46m   |
| HIGH   | 350 Lumens | 3h 40min  | 206m     | 29m   |
| MED    | 150 Lumens | 8h 25min  | 132m     | 19m   |
| LOW    | 50 Lumens  | 26h 20min | 80m      | 12m   |
| ECO    | 5 Lumens   | 120h      | 35m      | 6m    |
| STROBE | 900 Lumens | /         | /        | /     |
| SOS    | 50 Lumens  | /         | /        | /     |



# FD20 350 Lumens

## NEW-STYLE 2AA FOCUSING FLASHLIGHT



### ANSI/PLATO FL1

| MODE  | OUTPUT     | RUNTIME |           | DISTANCE |       |
|-------|------------|---------|-----------|----------|-------|
|       |            | Ni-MH   | Alkaline  | SPOT     | FLOOD |
| TURBO | 350 Lumens | 36min   | 2h        | 115m     | 48m   |
| HIGH  | 100 Lumens | 4h      | 7h 30min  | 61m      | 25m   |
| MED   | 50 Lumens  | 12h     | 16h 40min | 44m      | 18m   |
| LOW   | 8 Lumens   | 55h     | 80h       | 17m      | 7m    |

**Battery:** 2\*AA  
**Size:** 153.2mm Length x 20mm Body diameter x 25.4mm Head diameter  
**Weight:** 87 grams (excluding batteries)



# RC/UC SERIES

Powerful, reliable, rechargeable

Taking advantage of environmental-friendliness and low operating costs, Fenix's rechargeable flashlights can quickly regain power by recharging rechargeable Li-ion batteries, using USB charging from standard AC as well as onboard vehicle charging outlets and personal computers. The charging operation is very simple and convenient. Featuring toughness, reliability and a fully waterproof design, a Fenix rechargeable flashlight is your best choice for military and law enforcement use, hunting, searching and rescuing, etc.



# RC40 6000 Lumens

## SUPER BRIGHT RECHARGEABLE FLASHLIGHT



51



- 730m beam distance
- Rechargeable
- USB discharging
- Dual switches control
- Lockout function
- Momentary on strobe
- S.O.S
- IP68 underwater 2m

**Battery:** Tailored 7800mAh/7.4V Li-ion battery pack  
**Size:** 272mm Length x 52mm Body diameter x 108mm Head diameter  
**Weight:** 1234 grams (excluding battery)

| ANSI/PLATO FL1 |             |           |          |
|----------------|-------------|-----------|----------|
| MODE           | OUTPUT      | RUNTIME   | DISTANCE |
| TURBO          | 6000 Lumens | 1h        | 730m     |
| HIGH           | 4000 Lumens | 1h 50min  | 633m     |
| MED            | 2000 Lumens | 4h 5min   | 444m     |
| LOW            | 500 Lumens  | 18h 15min | 221m     |
| ECO            | 45 Lumens   | 125h      | 58m      |
| STROBE         | 6000 Lumens | /         | /        |
| SOS            | 500 Lumens  | /         | /        |



# RC20 1000 Lumens

## SUPER BRIGHT RECHARGEABLE SEARCHING FLASHLIGHT



- Tactical mode
- Outdoor mode
- Battery level indication
- Dual switches control
- Momentary on strobe
- IP68 underwater 2m

**Battery:** Tailored 2600mAh/3.7V Li-ion battery pack  
**Size:** 161mm Length x 25.4mm Body diameter x 40mm Head diameter  
**Weight:** 205 grams (excluding battery)

| ANSI/PLATO FL1 |             |              |                 |          |          |
|----------------|-------------|--------------|-----------------|----------|----------|
| MODE           | OUTPUT      | GENERAL MODE | SIMPLIFIED MODE | RUNTIME  | DISTANCE |
| TURBO          | 1000 Lumens | ✓            | ✓               | 1h 10min | 290m     |
| HIGH           | 425 Lumens  | ✓            |                 | 2h 55min | 183m     |
| MED            | 150 Lumens  | ✓            | ✓               | 9h 50min | 108m     |
| LOW            | 10 Lumens   | ✓            |                 | 120h     | 29m      |
| STROBE         | 1000 Lumens | ✓            | ✓               | /        | /        |

# RC11 1000 Lumens

## 18650 MAGNETIC CHARGING OUTDOOR FLASHLIGHT



- Magnetic charging
- One switch control
- Strobe
- IP68 underwater 2m



Charging indicator


**Battery:** 1\*18650/2\*CR123A  
**Size:** 113.5mm Length x 25.4mm Diameter  
**Weight:** 70 grams (excluding battery)

| ANSI/PLATO FL1 |             |           |          |
|----------------|-------------|-----------|----------|
| MODE           | OUTPUT      | RUNTIME   | DISTANCE |
| TURBO          | 1000 Lumens | 1h 20min  | 190m     |
| HIGH           | 500 Lumens  | 2h 50min  | 134m     |
| MED            | 150 Lumens  | 11h 10min | 72m      |
| LOW            | 50 Lumens   | 29h 30min | 43m      |
| ECO            | 10 Lumens   | 135h      | 14m      |
| STROBE         | 1000 Lumens | /         | /        |

52

# RC09 550 Lumens

## MAGNETIC CHARGING EDC FLASHLIGHT




**Battery:** 1\*16340/1\*CR123A  
**Size:** 72mm Length x 21.5mm Diameter  
**Weight:** 45 grams (excluding battery)

### ANSI/PLATO FL1

| MODE  | OUTPUT     | RUNTIME | DISTANCE |
|-------|------------|---------|----------|
| TURBO | 550 Lumens | 35min   | 115m     |
| HIGH  | 150 Lumens | 2h35min | 60m      |
| MED   | 50 Lumens  | 8h55min | 36m      |
| LOW   | 5 Lumens   | 56h     | 12m      |

# RC05 300 Lumens

## 14500 MAGNETIC OUTDOOR FLASHLIGHT



**Battery:** 1\*14500/1\*AA  
**Size:** 94mm Length x 19mm Diameter  
**Weight:** 36.8 grams (excluding battery)

### ANSI/PLATO FL1

| MODE   | OUTPUT     | RUNTIME | DISTANCE |
|--------|------------|---------|----------|
| TURBO  | 300 Lumens | 55min   | 90m      |
| HIGH   | 150 Lumens | 2h      | 60m      |
| MED    | 50 Lumens  | 6h      | 37m      |
| LOW    | 5 Lumens   | 40h     | 11m      |
| STROBE | 300 Lumens | /       | /        |

# UC52 3100 Lumens

## SUPER BRIGHT INTELLIGENT FLASHLIGHT

NEW




**Battery:** Built-in 3500mAh/7.2V Li-ion battery  
**Size:** 153.5mm Length x 42mm head diameter x 25.9mm Body thickness  
**Weight:** 276 grams (including battery)

### ANSI/PLATO FL1

| MODE   | OUTPUT      | RUNTIME   | DISTANCE |
|--------|-------------|-----------|----------|
| TURBO  | 3100 Lumens | 42 min    | 253m     |
| HIGH   | 1000 Lumens | 2h 45min  | 145m     |
| MED    | 350 Lumens  | 8h 15min  | 85m      |
| LOW    | 100 Lumens  | 27h 30min | 44m      |
| ECO    | 15 Lumens   | 82h 30min | 18m      |
| STROBE | 1000 Lumens | /         | /        |
| SOS    | 100 Lumens  | /         | /        |

# UC35 960 Lumens

## USB RECHARGEABLE TACTICAL FLASHLIGHT

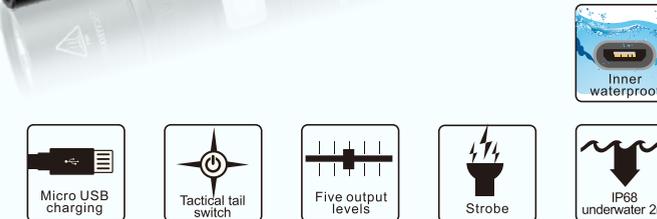

**Battery:** 1\*18650/2\*CR123A  
**Size:** 153.5mm Length x 42mm head diameter x 26mm Diameter  
**Weight:** 276 grams (including battery)

### ANSI/PLATO FL1

| MODE   | OUTPUT     | RUNTIME  | DISTANCE |
|--------|------------|----------|----------|
| TURBO  | 960 Lumens | 1h 30min | 253m     |
| HIGH   | 480 Lumens | 2h 40min | 145m     |
| MED    | 180 Lumens | 9h 15min | 85m      |
| LOW    | 50 Lumens  | 38h      | 44m      |
| ECO    | 14 Lumens  | 150h     | 18m      |
| STROBE | 960 Lumens | /        | /        |

# UC30 1000 Lumens

## USB RECHARGEABLE TACTICAL FLASHLIGHT

NEW



There colors of spare rubber

- Micro USB charging
- XP-L HI LED
- Battery level indication
- One switch control
- Five output levels
- Strobe



Battery: 1\*18650/2\*CR123A  
 Size: 130mm Length x 25.4mm Diameter  
 Weight: 77 grams (excluding battery)

### ANSI/PLATO FL1

| MODE   | OUTPUT      | RUNTIME   | DISTANCE |
|--------|-------------|-----------|----------|
| TURBO  | 1000 Lumens | 1h 25min  | 253m     |
| HIGH   | 350 Lumens  | 3h 20min  | 156m     |
| MED    | 150 Lumens  | 8h 45min  | 101m     |
| LOW    | 50 Lumens   | 28h 25min | 58m      |
| ECO    | 5 Lumens    | 150h      | 21m      |
| STROBE | 1000 Lumens | /         | /        |

# UC09 500 Lumens

## USB RECHARGEABLE RIGHT-ANGLE FLASHLIGHT

NEW



- Micro USB charging
- XP-G3 neutral white LED
- Right-angle illumination
- Battery level indication
- Red signal light
- Magnetic absorption base



Battery: 1\*16340/1\*CR123A  
 Size: 70mm Length x 19mm Diameter  
 Weight: 39 grams (excluding battery)

### ANSI/PLATO FL1

|             | MODE         | OUTPUT     | RUNTIME  | DISTANCE |
|-------------|--------------|------------|----------|----------|
| White Light | TURBO        | 500 Lumens | 1h 20min | 85m      |
|             | HIGH         | 150 Lumens | 2h 50min | 46m      |
|             | MED          | 300 Lumens | 13h20min | 23m      |
|             | LOW          | 5 Lumens   | 110h     | 6m       |
| Red Light   | RED          | 3Lumens    | 30h      | /        |
|             | SIGNAL LIGHT | 3Lumens    | /        | /        |
|             | SOS          | 3Lumens    | /        | /        |

# UC02SS 130 Lumens

## USB RECHARGEABLE KEYCHAIN FLASHLIGHT



- Stainless steel material
- Micro USB charging
- Two color options
- Twisty operation
- IP68 underwater 2m



Battery: 1\*10180  
 Size: 43.2mm Length x 14mm Head diameter  
 Weight: 18.4 grams (excluding battery)

### ANSI/PLATO FL1

|  | MODE | OUTPUT     | RUNTIME  | DISTANCE |
|--|------|------------|----------|----------|
|  | HIGH | 130 Lumens | 25min    | 48m      |
|  | LOW  | 10 Lumens  | 3h 50min | 14m      |

# UC02 130 Lumens

## USB RECHARGEABLE KEYCHAIN FLASHLIGHT



- Micro USB charging
- Three color options
- Twisty operation
- IP68 underwater 2m

Battery: 1\*10180  
 Size: 43.2mm Length x 14mm Head diameter  
 Weight: 8 grams (excluding battery)

### ANSI/PLATO FL1

|  | MODE | OUTPUT     | RUNTIME  | DISTANCE |
|--|------|------------|----------|----------|
|  | HIGH | 130 Lumens | 25min    | 48m      |
|  | LOW  | 10 Lumens  | 3h 50min | 14m      |

# SD SERIES

## Underwater sport lights

Fenix SD series is born for underwater sport. This series are all fitted with neutral white LED's for better color rendering, which ensures better vision when diving. A virtually indestructible dual layer body protects the core circuit and battery compartments from the cold outside temperatures and high pressures of the deep, and strong corrosion resistance means you won't have to compromise when diving, even to a depth of 100 meter.

## SD20 1000 Lumens HIGH-OUTPUT DIVING FLASHLIGHT



**Battery:** 2\*18650/4\*CR123A

**Size:** 208mm Length x 26mm Body diameter x 40mm Head diameter

**Weight:** 245 grams (excluding batteries)

| ANSI/PLATO FL1 |            |             |          |
|----------------|------------|-------------|----------|
| MODE           | OUTPUT     | RUNTIME     | DISTANCE |
| WHITE          | HIGH       | 1000 Lumens | 3h       |
|                | LOW        | 400 Lumens  | 7h 30min |
| RED            | 105 Lumens | 8h          | 73m      |



Rotating magnetic ring for output selections

Twist the flashlight head to get access to three lighting modes and turn the light on and off.




Battery compatibility

Powered by two 18650 batteries or four CR123A batteries.

# SD11 1000 Lumens




## DIVING AND PHOTOGRAPHING FLASHLIGHT

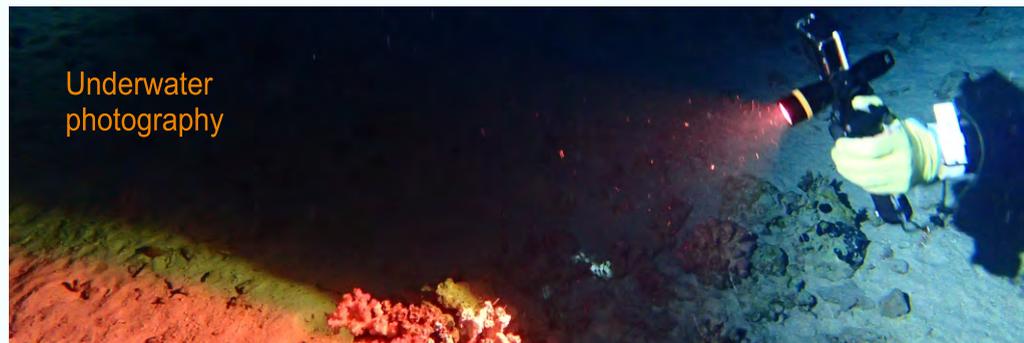

Underwater photography



Photography lighting effect



Rotary magnetic ring



100m submersible



Flashlight clip for photography

**Battery:** 1\*18650/2\*CR123A  
**Size:** 138mm Length x 26mm Body diameter x 34mm Head diameter  
**Weight:** 132.5 grams (excluding battery)

### ANSI/PLATO FL1

|       | MODE | OUTPUT      | RUNTIME  | DISTANCE |
|-------|------|-------------|----------|----------|
| WHITE | HIGH | 1000 Lumens | 2h       | 45m      |
|       | LOW  | 500 Lumens  | 3h 40min | 30m      |
|       | R+   | 250 Lumens  | 3h       | 23m      |

# SE10 100 Lumens

## 3AA INTRINSICALLY SAFE EXPLOSION-PROOF FLASHLIGHT

II 1G Ex ia IIC T4 Ga /II 1D Ex ia IIIC T135°C Da explosion-proof classifications



Included Allen wrench for battery replacement



Tactical tail switch - one switch control



ATEX directives




IEC certificate



Tactical tail switch



U-shaped tail design-tail standing



One switch control



IP68 underwater 2m

**Battery:** 3\*AA  
**Size:** 177.5mm Length x 53mm Width x 51mm Height  
**Weight:** 164 grams (excluding batteries)

### ANSI/PLATO FL1

| OUTPUT     | RUNTIME   | DISTANCE |
|------------|-----------|----------|
| 100 Lumens | 12h 50min | 160m     |

# HP SERIES

## High-performance separated headlamps

Taking full advantage of modern lighting technology and creative design, Fenix successfully develops the HP series headlamps with outstanding performance. By using a metal housing and constant brightness regulating circuit, Fenix's HP series produces much brighter beams and offer more functions, a longer runtime and better durability than competitors. With IP68 rated structure, the Fenix HP models will satisfy your various lighting needs whether searching and rescuing, caving, cycling, mountaineering and hiking, etc.



# HP30R 1750 Lumens

## RECHARGEABLE SPOT- AND FLOODLIGHT HEADLAMP



S.O.S




**Battery:** 2\*18650/4\*CR123A  
**Size:** Headlamp: 77mm Length x 52mm Width x 34mm Height  
**Battery case:** 115mm Length x 56mm Width x 30mm Height  
**Weight:** 285 grams (excluding batteries)

| ANSI/PLATO FL1 |       |             |          |          |
|----------------|-------|-------------|----------|----------|
|                | MODE  | OUTPUT      | RUNTIME  | DISTANCE |
| SPOTLIGHT      | TURBO | 1000 Lumens | 4h       | 202m     |
|                | HIGH  | 400 Lumens  | 6h 30min | 124m     |
|                | MED   | 130 Lumens  | 21h      | 72m      |
|                | LOW   | 30 Lumens   | 83h      | 34m      |
| FLOODLIGHT     | TURBO | 750 Lumens  | 4h       | 61m      |
|                | HIGH  | 400 Lumens  | 6h       | 46m      |
|                | MED   | 130 Lumens  | 23h      | 27m      |
|                | LOW   | 5 Lumens    | 400h     | 7m       |
|                | SOS   | 130 Lumens  | 46h      | /        |

# HP15 ULTIMATE EDITION 900 Lumens

## SEPARATED HIGH-OUTPUT HEADLAMP



**Battery:** 4\*AA  
**Size:** Headlamp: 67.4mm Length x 55.9mm Width x 34.7mm Height  
**Battery case:** 88.8mm Length x 73.7mm Width x 26.2mm Height  
**Weight:** 154.2 grams (excluding batteries)


| ANSI/PLATO FL1 |       |            |          |          |          |
|----------------|-------|------------|----------|----------|----------|
|                | MODE  | OUTPUT     | RUNTIME  |          | DISTANCE |
|                |       |            | Ni-MH    | Alkaline |          |
|                | BURST | 900 Lumens | /        | /        | 178m     |
|                | HIGH  | 400 Lumens | 3h 30min | 3h 10min | 119m     |
|                | MED   | 150 Lumens | 10h      | 8h       | 73m      |
|                | LOW   | 50 Lumens  | 40h      | 44h      | 42m      |
|                | ECO   | 10 Lumens  | 160h     | 170h     | 19m      |
|                | SOS   | 50 Lumens  | /        | /        | /        |

# HP25R 1000 Lumens

## HIGH-OUTPUT MOUNTAINEERING SPOT- AND FLOODLIGHT HEADLAMP



|            | MODE      | OUTPUT      | RUNTIME | DISTANCE |
|------------|-----------|-------------|---------|----------|
| FLOODLIGHT | HIGH      | 350 Lumens  | 2.5h    | 44m      |
|            | MED       | 130 Lumens  | 9h      | 25m      |
|            | LOW       | 30 Lumens   | 40h     | 13m      |
|            | ECO       | 4 Lumens    | 150h    | 6m       |
| SPOTLIGHT  | TURBO     | 1000 Lumens | 1.5h    | 187m     |
|            | HIGH      | 350 Lumens  | 4.5h    | 109m     |
|            | MED       | 130 Lumens  | 12h     | 66m      |
|            | LOW       | 30 Lumens   | 42h     | 34m      |
|            | RED       | 0.2 Lumens  | 96h     | /        |
|            | RED FLASH | 0.2 Lumens  | 192h    | /        |

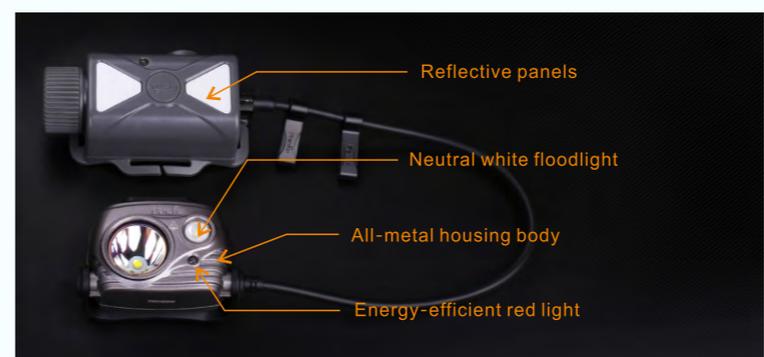


**Battery:** 1\*18650/2\*CR123A  
**Size:** Headlamp: 60mm Length x 54mm Width x 32.5mm Height  
**Battery case:** 82.5mm Length x 50mm Width x 35mm Height  
**Weight:** 183.5 grams (excluding batteries)



# HM SERIES

## High-performance integrated headlamps

The HM series of headlamps are high-performance and hugely reliable headlamps made for rigid outdoor environments. The all-metal housing design is extremely tough, being dustproof, waterproof and highly resistant to impacts and cold. In addition, this series features long runtime and excellent heat dissipation. It is a series of multipurpose headlamps, especially suitable for high altitude climbing and long-distance hiking in rigid environments.

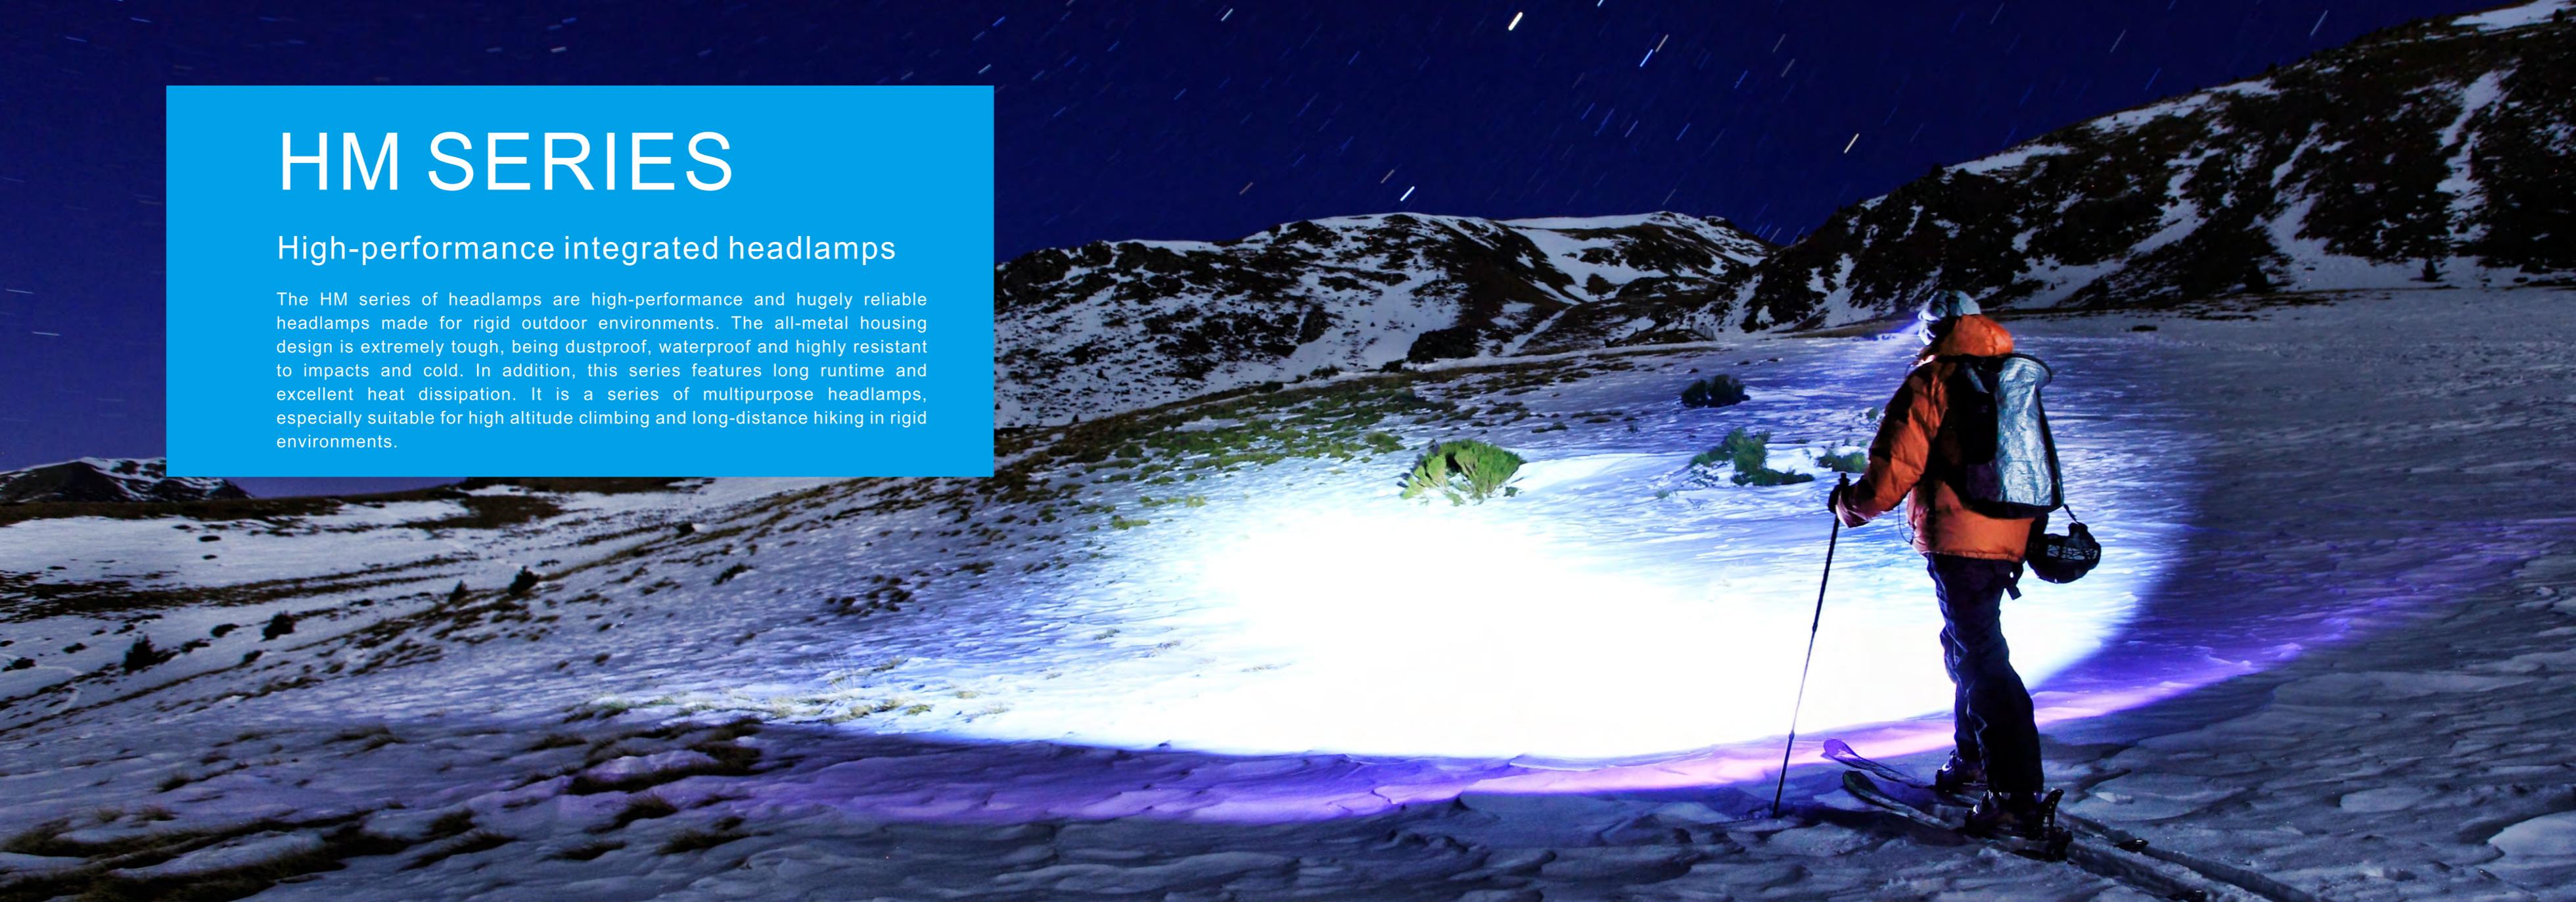

# HM50R 500 Lumens

## RECHARGEABLE COLD-RESISTANT MULTIPURPOSE HEADLAMP

NEW



- Micro USB charging
- Battery level indication
- Reflective/sweat-channeling headband
- IP68 underwater 2m

**Battery:** 1\*16340/1\*CR123A  
**Size:** 67.5mm Length x 33mm Width x 28mm Height  
**Weight:** 63 grams (excluding battery)

| ANSI/PLATO FL1 |            |         |          |          |
|----------------|------------|---------|----------|----------|
| MODE           | OUTPUT     | RUNTIME |          | DISTANCE |
|                |            | CR123A  | 16340    |          |
| TURBO          | 500 Lumens | 2h      | 2h 30min | 80m      |
| HIGH           | 130 Lumens | 14h     | 10h      | 42m      |
| MED            | 30 Lumens  | 48h     | 24h      | 20m      |
| LOW            | 4 Lumens   | 128h    | 90h      | 6m       |

# HL60R 950 Lumens

## RECHARGEABLE WHITE&RED HEADLAMP



- White&red light sources
- High-performance neutral white
- Micro USB charging
- Battery level indication
- Black and desert yellow
- IP68 underwater 2m

**Battery:** 1\*18650/2\*CR123A  
**Size:** 87mm Length x 46mm Width x 51mm Height  
**Weight:** 121 grams (excluding battery)

| ANSI/PLATO FL1 |            |         |          |  |
|----------------|------------|---------|----------|--|
| MODE           | OUTPUT     | RUNTIME | DISTANCE |  |
| TURBO          | 950 Lumens | 48min   | 116m     |  |
| HIGH           | 400 Lumens | 3h      | 76m      |  |
| MED            | 150 Lumens | 10h     | 46m      |  |
| LOW            | 50 Lumens  | 29h     | 27m      |  |
| ECO            | 5 Lumens   | 100h    | 8m       |  |
| RED LIGHT      | 1 Lumen    | 100h    | /        |  |

# HL55 900 Lumens

## ONE 18650 POWERED INTEGRATED HEADLAMP



- 900 lumens burst mode
- One switch control
- High-performance neutral white
- IP68 underwater 2m

**Battery:** 1\*18650/2\*CR123A  
**Size:** 84mm Length x 46mm Width x 48mm Height  
**Weight:** 115 grams (excluding battery)

| ANSI/PLATO FL1 |            |          |          |  |
|----------------|------------|----------|----------|--|
| MODE           | OUTPUT     | RUNTIME  | DISTANCE |  |
| BURST          | 900 Lumens | /        | 116m     |  |
| HIGH           | 420 Lumens | 3h 45min | 79m      |  |
| MED            | 165 Lumens | 10h      | 50m      |  |
| LOW            | 55 Lumens  | 30h      | 29m      |  |
| ECO            | 10 Lumens  | 150h     | 12m      |  |

# HL23 150 Lumens

## INTEGRATED TRI-PROOF HEADLAMP



- IP68 dustproof
- One switch control
- Three output levels
- Grey, gold and green
- IP68 underwater 2m

**Battery:** 1\*AA  
**Size:** 71mm Length x 38.9mm Width x 40mm Height  
**Weight:** 52 grams (excluding battery)

| ANSI/PLATO FL1 |            |          |          |          |
|----------------|------------|----------|----------|----------|
| MODE           | OUTPUT     | RUNTIME  |          | DISTANCE |
|                |            | Ni-MH    | Alkaline |          |
| HIGH           | 150 Lumens | 1h 20min | 1h       | 55m      |
| MED            | 50 Lumens  | 5h 40min | 4h 25min | 32m      |
| LOW            | 3 Lumens   | 100h     | 110h     | 8m       |

# HL SERIES

## Lightweight outdoor headlamps

With exquisite appearance, excellent performance and wide-ranging output options, Fenix develops the HL series with optimum weight-to-output ratios. Waterproof rating is IP68, and with their high lumen output, are ideal for outdoor hiking, jogging, climbing, camping and any form of daily use, making you enjoy real outdoor fun in various environments and weather conditions.



# HL40R 600 Lumens

HIGH-PERFORMANCE FOCUSING HEADLAMP



- Focusing design
- Micro USB charging
- Battery level indication
- Momentary on turbo
- Grey and blue
- IP66 rated protection

**Battery:** Built-in 2000mAh Li-ion battery pack  
**Size:** 68mm Length x 54mm Width x 42mm Height  
**Weight:** 130 grams (including battery)

NEW

| ANSI/PLATO FL1  |            |            |            |           |      |
|-----------------|------------|------------|------------|-----------|------|
| MODE            | OUTPUT     | RUNTIME    | DISTANCE   |           |      |
|                 |            |            | FLOODLIGHT | SPOTLIGHT |      |
| GENERAL MODE    | BURST MODE | 600 Lumens | 1h 20min   | 43m       | 147m |
|                 | HIGH       | 300 Lumens | 4.5h       | 29m       | 96m  |
|                 | MED        | 130 Lumens | 11h        | 19m       | 64m  |
|                 | LOW        | 70 Lumens  | 22h        | 14m       | 46m  |
|                 | ECO        | 30 Lumen   | 50h        | 9m        | 30m  |
| FUNCTIONAL MODE | READING    | 4 Lumens   | 200h       | 4m        | 10m  |
|                 | SOS        | 30 Lumens  | 100h       | 9m        | 30m  |

# HL32R 600 Lumens

RECHARGEABLE MULTIPURPOSE OUTDOOR HEADLAMP



- Neutral white and red light
- Micro USB charging
- Battery level indication
- Reflective/sweat-channeling headband
- Grey and blue
- S.O.S
- IP66 rated protection

**Battery:** Built-in 2000mAh Li-ion battery pack  
**Size:** 64mm Length x 46mm Width x 37.5mm Height  
**Weight:** 108 grams (including battery)

NEW

| ANSI/PLATO FL1  |            |            |          |     |
|-----------------|------------|------------|----------|-----|
| MODE            | OUTPUT     | RUNTIME    | DISTANCE |     |
| GENERAL MODE    | BURST MODE | 600 Lumens | 1h       | 73m |
|                 | TURBO      | 300 Lumens | 4.5h     | 49m |
|                 | HIGH       | 130 Lumens | 14h      | 34m |
|                 | MED        | 70 Lumens  | 24h      | 23m |
|                 | LOW        | 30 Lumens  | 60h      | 16m |
| FUNCTIONAL MODE | ECO        | 4 Lumens   | 200h     | 7m  |
|                 | RED        | 1 Lumen    | 100h     | 4m  |
|                 | SOS        | 30 Lumens  | 120h     | 16m |
|                 | RED FLASH  | 1 Lumen    | 200h     | 4m  |

# HL12R 400 Lumens

RECHARGEABLE DUAL LIGHTING OUTDOOR HEADLAMP



- White and red light sources
- Micro USB charging
- Battery level indication
- Momentary on turbo
- Reflective/sweat-channeling headband
- Grey, purple and blue
- IP66 rated protection

**Battery:** Built-in 1000mAh Li-polymer battery pack  
**Size:** 56mm Length x 40mm Width x 31.9mm Height  
**Weight:** 73.3 grams (including battery)

NEW

| ANSI/PLATO FL1  |            |            |          |     |
|-----------------|------------|------------|----------|-----|
| MODE            | OUTPUT     | RUNTIME    | DISTANCE |     |
| GENERAL MODE    | BURST MODE | 400 Lumens | 1h       | 64m |
|                 | HIGH       | 130 Lumens | 8h       | 36m |
|                 | MED        | 70 Lumens  | 13h      | 26m |
|                 | LOW        | 30 Lumens  | 33h      | 17m |
|                 | ECO        | 4 Lumens   | 110h     | 7m  |
| FUNCTIONAL MODE | RED        | 1 Lumen    | 40h      | 3m  |
|                 | SOS        | 30 Lumens  | 66h      | 17m |
|                 | RED FLASH  | 1 Lumen    | 80h      | 3m  |

# HL30 2018

300 Lumens

NEW

## HIGH-PERFORMANCE HIKING&CAMPING HEADLAMP



73



Battery: 2\*AA  
 Size: 64mm Length x 50mm Width x 38mm Height  
 Weight: 73.5 grams (excluding batteries)

| ANSI/PLATO FL1  |           |            |          |     |
|-----------------|-----------|------------|----------|-----|
| MODE            | OUTPUT    | RUNTIME    | DISTANCE |     |
| GENERAL MODE    | TURBO     | 300 Lumens | 4.5h     | 50m |
|                 | HIGH      | 130 Lumens | 9h       | 35m |
|                 | MED       | 70 Lumens  | 41h      | 23m |
|                 | LOW       | 30 Lumens  | 71h      | 16m |
|                 | ECO       | 4 Lumens   | 200h     | 6m  |
| FUNCTIONAL MODE | RED       | 1 Lumen    | 170h     | 4m  |
|                 | SOS       | 30 Lumens  | 142h     | 16m |
|                 | RED FLASH | 1 Lumen    | 340h     | 4m  |

# HL16 70 Lumens

NEW

## DUAL LIGHTING SOURCE PARENT-CHILD HEADLAMP




Battery: 1\*AA  
 Size: 61.5mm Length x 39.5mm Width x 36mm Height  
 Weight: 55 grams (excluding battery)

| ANSI/PLATO FL1 |           |         |          |          |
|----------------|-----------|---------|----------|----------|
| MODE           | OUTPUT    | RUNTIME |          | DISTANCE |
|                |           | 镍氢      | 碱性       |          |
| HIGH           | 70 Lumens | 3h      | 2.5h     | 35m      |
| MED            | 30 Lumens | 7h      | 7h 30min | 24m      |
| LOW            | 4 Lumens  | 60h     | 58h      | 8m       |
| RED            | 1 Lumen   | 75h     | 85h      | /        |
| RED FLASH      | 1 Lumen   | 150h    | 170h     | /        |


# HL26R 450 Lumens

NEW

## RECHARGEABLE LIGHTWEIGHT TRAIL RUNNING HEADLAMP

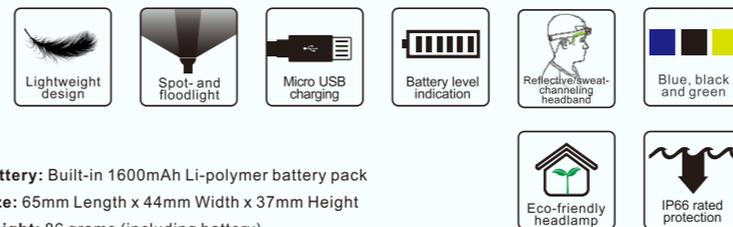

Battery: Built-in 1600mAh Li-polymer battery pack  
 Size: 65mm Length x 44mm Width x 37mm Height  
 Weight: 86 grams (including battery)

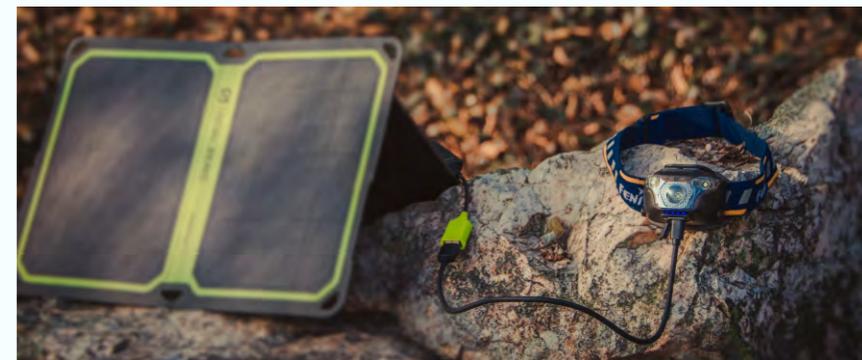


| ANSI/PLATO FL1 |        |            |          |      |
|----------------|--------|------------|----------|------|
| MODE           | OUTPUT | RUNTIME    | DISTANCE |      |
| SPOTLIGHT      | TURBO  | 450 Lumens | 1h 30min | 100m |
|                | HIGH   | 130 Lumens | 6h       | 57m  |
|                | MED    | 70 Lumens  | 12h      | 42m  |
|                | LOW    | 30 Lumens  | 25h      | 30m  |
| FLOODLIGHT     | HIGH   | 40 Lumens  | 13h      | 10m  |
|                | LOW    | 4 Lumens   | 100h     | 4m   |
|                | SOS    | 40 Lumens  | 26h      | /    |

# HL10 70 Lumens

## MULTIPURPOSE MINI HEADLAMP



75




Battery: 1\*AAA  
 Size: 70mm Length x 25mm Width x 23mm Height  
 Weight: 33 grams (excluding battery)

| ANSI/PLATO FL1 |           |         |          |          |
|----------------|-----------|---------|----------|----------|
| MODE           | OUTPUT    | RUNTIME |          | DISTANCE |
|                |           | Ni-MH   | Alkaline |          |
| HIGH           | 70 Lumens | 1h      | 40min    | 30m      |
| MED            | 30 Lumens | 3h10min | 2h 30min | 19m      |
| LOW            | 4 Lumens  | 26h     | 24h      | 6m       |

# HL15 200 Lumens

## LIGHTWEIGHT RUNNING HEADLAMP



Battery: 2\*AAA  
 Size: 63mm Length x 41.5mm Width x 35mm Height  
 Weight: 60 grams (excluding batteries)

| ANSI/PLATO FL1 |            |          |           |          |
|----------------|------------|----------|-----------|----------|
| MODE           | OUTPUT     | RUNTIME  |           | DISTANCE |
|                |            | 镍氢       | 碱性        |          |
| TURBO          | 200 Lumens | 1h 10min | 1h 30min  | 50m      |
| HIGH           | 70 Lumens  | 3h 30min | 4h        | 29m      |
| MED            | 30 Lumens  | 8h 30min | 12h 30min | 18m      |
| LOW            | 4 Lumens   | 37h      | 58h       | 8m       |
| EOC            | 0.2 Lumens | 75h      | 85h       | /        |
| RED FLASH      | 0.2 Lumens | 150h     | 170h      | /        |





# BICYCLE LIGHT SERIES

Coming from a strong innovation background, Fenix's bicycle lights feature a Dual Distance Beam System, meaning they provide both close-up visibility and long range illumination together with a broad flood beam. With a user-friendly structural design, quality material and IPX6 waterproof rating, Fenix bicycle lights are the rider's best choice, and ensure users a safe and excellent riding experience during night riding.

# BC30R 1800 Lumens


## HIGH-PERFORMANCE OLED DISPLAY BICYCLE LIGHT




NEW




OLED digital display



High-performance neutral white light



Micro USB charging



One cable control



Dual Distance Beam System



Quick-release handlebar mount



Momentary on Burst



IP66 rated protection

**Battery:** Built-in 5200mAh/3.7V rechargeable battery  
**Size:** 114mm Length x 50.5mm Width x 31.8mm Height  
**Weight:** 240 grams (including battery and excluding mount)



### ANSI/PLATO FL1

| MODE     | OUTPUT      | RUNTIME   | DISTANCE |
|----------|-------------|-----------|----------|
| BURST    | 1800 Lumens | /         | 161m     |
| HIGH     | 1000 Lumens | 2h 40min  | 122m     |
| MED      | 400 Lumens  | 7h 20min  | 76m      |
| LOW      | 150 Lumens  | 16h 10min | 47m      |
| ECO      | 50 Lumens   | 36h       | 28m      |
| FLASHING | 150 Lumens  | /         | /        |

# BC30 1800 Lumens

## INTEGRATED SUPER BRIGHT BICYCLE LIGHT



Dual Distance Beam System



Momentary on burst



Quick-release handlebar mount



IP66 rated protection

**Battery:** 2\*18650/4\*CR123A  
**Size:** 126.7mm Length x 50mm Width x 31.8mm Height  
**Weight:** 161 grams (excluding batteries and mount)

### ANSI/PLATO FL1

| MODE     | OUTPUT      | RUNTIME  | DISTANCE |
|----------|-------------|----------|----------|
| BURST    | 1800 Lumens | /        | 170m     |
| HIGH     | 1200 Lumens | 1h 50min | 135m     |
| MED      | 500 Lumens  | 5h       | 87m      |
| LOW      | 200 Lumens  | 11h      | 56m      |
| ECO      | 100 Lumens  | 20h      | 41m      |
| FLASHING | 200 Lumens  | /        | /        |

# BT30R 1800 Lumens

RECHARGEABLE HIGH-PERFORMANCE SEPARATED BICYCLE LIGHT



- Dual Distance Beam System
- High-performance neutral white light
- Momentary on burst
- IP66 rated protection

**Battery:** Included BA2B battery pack, A4C battery case is available (2\*18650/4\*CR123A)  
**Size: Headlight:** 74mm Length x 50.6mm Width x 43.5mm Height  
**Battery pack:** 87mm Length x 59mm Width x 37mm Height  
**Weight:** Headlight: 92 grams  
 Battery pack: 168 grams

# BC21R 880 Lumens

RECHARGEABLE PORTABLE BICYCLE LIGHT



- Dual Distance Beam System
- High-performance neutral white
- Micro USB charging
- Side alerting light
- Battery level indication
- One switch control
- IP66 rated protection

**Battery:** 1\*18650/2\*CR123A  
**Size:** 113mm Length x 40.5mm Width x 43mm Height  
**Weight:** 91 grams (excluding battery and mount)

## ANSI/PLATO FL1

| MODE  | OUTPUT                  | RUNTIME   | DISTANCE |
|-------|-------------------------|-----------|----------|
| TURBO | 880 Lumens              | 1h 20min  | 125m     |
| HIGH  | 380 Lumens              | 4h 30min  | 86m      |
| MED   | 200 Lumens              | 8h 30min  | 62m      |
| LOW   | 100 Lumens              | 15h 50min | 44m      |
| FLASH | 380 Lumens & 100 Lumens | /         | /        |



A photograph of a glowing orange tent pitched in a snowy mountain landscape at dusk. The tent is illuminated from within, casting a warm orange glow. The surrounding environment is a vast, snow-covered mountain range under a dark, twilight sky. The tent is set up on a snow-covered slope, and several ski poles are visible in the foreground. The overall scene conveys a sense of adventure and outdoor exploration in a cold, high-altitude environment.

# CAMPING LANTERN SERIES

Fenix's camping lanterns are all about innovation, and provide all-rounder performance. From the icy cold North Pole to the rain-soaked tropical forests, Fenix's all-weather waterproof lanterns provide through, uncompromising performance. Features listing from an exclusive dual-fuel battery compartment to multifaceted globe and a magnetic base, Fenix's camping lanterns keep your adventure going, anywhere, anytime!

# CP30R 400 Lumens

NEW

RECHARGEABLE MULTIFUNCTIONAL MODULE CAMPING LANTERN



- Module design
- Magnetic connection
- LED module
- Bluetooth speaker module
- Micro USB charging and discharging
- Sleeping mode
- 10000mAh power source
- Tripod socket
- IP66 Rated protection
- Two colors for option

**Battery:** Built-in 10000mAh Li-polymer battery  
**Size:** 72mm Length x 72mm Width x 122.5mm Height  
**Weight:** 550 grams (including battery)

| MODE          | OUTPUT     | RUNTIME | BEAM DIAMETER |
|---------------|------------|---------|---------------|
| TURBO         | 400 Lumens | 5h      | 25m ( Max )   |
| HIGH          | 200 Lumens | 13h     |               |
| MED           | 80 Lumens  | 27h     |               |
| LOW           | 16 Lumens  | 130h    |               |
| SLEEPING MODE | 40 Lumens  | 1h      |               |

# CL30R 650 Lumens

RECHARGEABLE HIGH-PERFORMANCE CAMPING LANTERN



- 35m wide beam diameter
- Micro USB charging and discharging
- Battery level indication
- Tripod socket
- Dual independent circuit
- IP67 Rated protection

**Battery:** 1 to 3 rechargeable 18650 Li-ion battery  
**Size:** 93mm Length x 93mm Width x 136mm Height  
**Weight:** 412 grams (excluding battery)

| MODE     | OUTPUT     | RUNTIME  |         | BEAM DIAMETER |
|----------|------------|----------|---------|---------------|
|          |            | 2600mAh  | 3500mAh |               |
| TURBO    | 650 Lumens | 4h 30min | 6h      | 35m (Max)     |
| HIGH     | 350 Lumens | 9h       | 12h     |               |
| MED      | 100 Lumens | 38h      | 51h     |               |
| LOW      | 50 Lumens  | 70h      | 93h     |               |
| ECO      | 10 Lumens  | 300h     | 400h    |               |
| FLASHING | 100 Lumens | 70h      | 93h     |               |

# CL25R 350 Lumens

RECHARGEABLE HIGH-PERFORMANCE ALL-SEASON CAMPING LANTERN



ISPO AWARD  
 ISPO(Asia) Award Gold Winner

- 25m wide beam diameter
- Neutral white and red lights
- Micro USB charging
- Magnetic absorption
- Tripod socket
- Moonlight mode
- IP66 rated protection

**Battery:** 1\*18650/2\*CR123A  
**Size:** 52mm Length x 52mm Width x 99mm Height  
**Weight:** 130 grams (excluding battery)



| MODE            | OUTPUT     | RUNTIME   |           | BEAM DIAMETER |
|-----------------|------------|-----------|-----------|---------------|
|                 |            | 18650     | CR123A    |               |
| TURBO           | 350 Lumens | 2h 15min  | 2h 5min   | 25m (Max)     |
| HIGH            | 200 Lumens | 5h        | 4h 10min  |               |
| MED             | 50 Lumens  | 23h 45min | 18h 50min |               |
| LOW (MOONLIGHT) | 0.8 Lumens | 600h      | 500h      |               |
| RED CONSTANT-ON | 1.5 Lumens | 44h       | 42h       |               |
| RED FLASH       | 1.5 Lumens | /         | /         |               |




# CL20R 300 Lumens

## RECHARGEABLE DUAL LIGHTING SOURCE CAMPING LANTERN


NEW




87



Neutral white and red lights



Micro USB charging



Battery level indication



Ultra long runtime



Magnetic absorption

**Battery:** Built-in 1600mAh Li-polymer battery  
**Size:** 72mm Length x 41.5mm Width x 50mm Height  
**Weight:** 91 grams (including battery)



Hanging loop



IP66 Rated protection

| MODE             | OUTPUT     | RUNTIME | BEAM DIAMETER |
|------------------|------------|---------|---------------|
| <b>TURBO</b>     | 300 Lumens | 6h      | 15m ( Max )   |
| <b>HIGH</b>      | 130 Lumens | 12h     |               |
| <b>MED</b>       | 40 Lumens  | 20h     |               |
| <b>LOW</b>       | 1 Lumen    | 200h    |               |
| <b>RED</b>       | 1.5 Lumens | 24h     |               |
| <b>RED FLASH</b> | 1.5 Lumens | /       |               |

# CLO9 200 Lumens

## ULTRA-PORTABLE HIGH-PERFORMANCE CAMPING LANTERN

NEW




Handy and exquisite



360° Spherical luminous body for 360° illumination



Red and green signal lights



Included USB battery



Magnetic absorption



Hanging loop



IP68 underwater 2m

**Battery:** 1\*ARB-L16-700U/ 1\*16340/ CR123A battery  
**Size:** 78.5mm Length x 22mm Diameter  
**Weight:** 31.5 grams (excluding battery)

| MODE             | OUTPUT     | RUNTIME      |        | BEAM DIAMETER |
|------------------|------------|--------------|--------|---------------|
|                  |            | ARB-L16-700U | CR123A |               |
| <b>TURBO</b>     | 200 Lumens | 2h 40min     | 6h     | 10m ( Max )   |
| <b>HIGH</b>      | 80 Lumens  | 5h 40min     | 19h    |               |
| <b>MED</b>       | 30 Lumens  | 19h 20min    | 36h    |               |
| <b>LOW</b>       | 1 Lumen    | 90h          | 150h   |               |
| <b>RED</b>       | 5 Lumens   | 30h          | 48h    |               |
| <b>RED FLASH</b> | 5 Lumens   | /            | /      |               |
| <b>GREEN</b>     | 5 Lumens   | 48h          | 76h    |               |

88

# HALBERD T5Ti TITANIUM TACTICAL PEN

NEW

# HALBERD T5 ALUMINUM ALLOY TACTICAL PEN

NEW



89



**Size:** 138.5mm Length x 12.5mm Diameter  
**Weight:** 40 grams  
**Body material:** TC4 Titanium alloy  
**Pen refill material:** Schmidt P950M  
**Strike bezel material:** Tungsten steel hard alloy  
**Three color options:** Space grey, Storm blue, Aurora purple

**Size:** 136mm Length x 12.5mm Diameter  
**Weight:** 27.5 grams  
**Body material:** 6061-T6 aircraft-grade aluminum alloy  
**Pen refill material:** Refer to the label  
**Strike bezel material:** Tungsten steel hard alloy  
**Surface processing:** HAIII hard-anodized





# ACCESSORIES

Fenix has been striving, and succeeded to develop some creative accessories to enhance and dramatically improve the performance of flashlights. Currently, Fenix has several kinds of accessories, including diffuser tips, filter adapters, traffic wands, remote switches, etc. to satisfy consumers' requirements.



## Filter Adapter (AOF-S/S+/M/L)

This is a Fenix flashlight accessory with outstanding filtering ability to maintain strong red/blue/green light which can be used when signaling.

- Uses a toughened ultra-clear glass lens with anti-reflective coating that provide heat resistance and maximum light penetrability.
- Anti-roll design, easy to attach, easy to remove.

## Traffic Wand (AOT-S/M/L)

Fenix traffic wand can convert your flashlight into a glowing orange high-visibility wand. It's the best option for emergency situations and traffic control.



## Rechargeable batteries

A protective circuit is built into the anode and covered with a riveted steel hat. The battery is fully covered with the steel shell, thus eliminating the potential risk of short circuiting caused by collision or impact.

- Prevent short circuit
- Multiple protection
- 500 charge cycles



| MODEL         | TYPE      | CAPACITY | VOLTAGE |
|---------------|-----------|----------|---------|
| ARB-L4-4800   | 26650     | 4800 mAh | 3.7V    |
| ARB-L18-3500  | 18650     | 3500 mAh | 3.6V    |
| ARB-L18-3400  | 18650     | 3400 mAh | 3.6V    |
| ARB-L18-2900  | 18650     | 2900 mAh | 3.6V    |
| ARB-L18-2600  | 18650     | 2600 mAh | 3.6V    |
| ARB-L16-700   | 16340     | 700 mAh  | 3.6V    |
| ARB-L14-800   | 14500     | 800 mAh  | 3.6V    |
| ARB-L18-3500U | 18650+USB | 3500 mAh | 3.6V    |
| ARB-L18-2600U | 18650+USB | 2600 mAh | 3.6V    |
| ARB-L16-700U  | 16340+USB | 700 mAh  | 3.6V    |
| ARB-L14-1600U | 14500+USB | 1600 mAh | 1.5V    |
| ARB-L26-4500P | 26650     | 4500 mAh | 3.6V    |
| ARB-L18-2900L | 18650     | 2900 mAh | 3.6V    |

NEW



## Remote Pressure Switch (AER-01)

- Durable for over 100,000 activations. Flashlight is activated by pressing any one of the four sensors.
- Cable made from resilient PU material; coiled length 23cm, expanded length 80cm
- The tail cap is made from T6-grade aluminum with Type III hard-anodized finish for durability and scratch resistance.
- Side switch on the tail cap is capable of transmitting current of 1A for a long period of time, and is independent from the pressure pad switch
- Waterproof to IPX8 standard
- The tail cap is 25.4mm in diameter, 40mm in length.
- Pressure pad switch, cable and the tail cap weigh 53.2 grams total



## Tactical Remote Pressure Switch (AER-02)

- Noiseless (no click) pressure pad switch (30mm long) with a lifespan of 100000 activations; capable of transmitting current of 3A for a long period of time
- Tactical tail switch capable of constant-on function, and can transmit 3A current for a long period of time
- Velcro design for fast and convenient operation.
- Cable made from resilient PU material can be extended from 24cm to 80cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized anti-abrasive finish.
- Waterproof to IPX8 standard
- Tail adapter size: Diameter: 25.4mm (1.0 in) Length: 31.5mm (1.2 in)
- Work with Fenix TK15UE, TK09, PD35TAC, PD35, PD32, UC35 flashlights
- Including pressure pad switch, coiled cable and tail adapter
- Total weight: 65g



## Tactical Remote Pressure Switch (AER-03)

Featuring momentary on, constant on and output selection (functions may vary between flashlights), the Fenix AER-03 is dedicated for tactical flashlights. Noiseless (no click) design, with attached Velcro makes it convenient for tactical missions or hunting.

- Work with Fenix TK32, TK16, TK20R (only for ON/OFF operation) flashlights
- Noiseless (no click) pressure pad switch (30mm long) with a lifespan of 100,000 activations, featuring output selection and capable of transmitting current of 3A for a long period of time
- Tactical tail switch capable of constant-on/momentary-on function, and can transmit 3A current for a long period of time
- Velcro design for fast and convenient operation
- Cable made from resilient PU material can be extended from 24cm to 80cm
- Tail adapter is made from T6-grade aluminum, type hard-anodized anti-abrasive finish
- Including pressure pad switch, coiled cable and tail adapter
- Waterproof to IPX8 standard
- Tail adapter size: Diameter: 26.5mm (1.0 in) Length: 31.5mm (1.2 in) Total weight: 65 grams (2.3 oz)



## Diffuser Tip (AOD-S / M / L)

Diffuser tips can soften the light and work as a camping light, signal light, reading light, tent light, etc.

- Durable, impact resistant and fireproof to V2 Standard



## Rail Mount (ALG-01)

- Adjustable diameter design allows use with a wide range of flashlights
- Universal slide-in flashlight ring
- With plastic spacer – flashlights with diameter 23.6 mm-24.2 mm can be fitted
- Without plastic spacer – flashlights with diameter 25.4 mm-26.0 mm can be fitted



## Rail Mount (ALG-00)

ALG-00 features the quick detachable Picatinny rail design which suits for tactical firearms with fish oil Picatinny rails. The compatible flashlight diameter ranges from 22.5-26mm, and wrench is needed when clip flashlights. Full-metal housing made of durable aircraft-grade aluminum, and premium type III hard-anodized anti-abrasive finish in all black treatment without light reflection.



## Quick-release Bike Mount (ALB-10)

Utilizing a unique split-type design for quick release of flashlights, the Fenix ALB-10 bicycle mount can effectively reduce the amount of steps and the time needed for mounting. Featuring Fenix's solidity and compatibility with a wide range of flashlights, this mount will ensure your safety during your night riding.

- Split-type design for quick release
- Fits flashlights with diameter of 18mm—26mm
- Rotating 30 degree design adjusts to any locking angle
- High-quality rubber mat provides shock-resistant and slip-resistant grip without scratching the handlebar
- Anti-aging, solid and able to withstand extended exposure to sunlight and rain



## Car Adapter (ARW-10)

- Compatible with ARE-C2, ARE-C1, ARE-C2+, ARE-C1+



## AFH-01 Portable Flashlight Tool Case

- Compatible with many Fenix products
- Double layer design expands storage capacity
- Liner made of environmentally friendly EVA
- Material features cushioning, impact resistance, thermal insulation and moisture resistance
- Case is made from PP environmental material
- External size: 280×220×80mm (11×8.7×3.1 in)
- Weight: 594 grams (20.9 oz) case only



## Helmet Attachment Hook Kit (ALD-02)

The ALD-02 helmet attachment hook set consists of four plastic hooks, which are designed to prevent the headband from slipping off the helmet.

- Environmentally friendly PC material
- 4 helmet attachment hooks included
- Applicable to helmet with thickness less than 6 mm
- Not for fully protective helmets or helmets with foam lining



## Headlamp Attachment (ALG-03)

ALG-03 headlamp attachment is specifically designed for HL55 and HL60R fixation to outdoor or industrial work helmets. It enables easy and convenient attachment and detachment of headlamp to and from helmet, and allows adjustment of the lighting angle of the headlamps. In addition, it uses thickened blown-sponge, to fit to more helmets in various ways.

- Durable nylon material ;
- 3M and TESA adhesive tapes are included ;
- Easy attachment.



## Four Channels Smart Charger (ARE-C2+)

Fenix ARE-C2+ is a four channels smart charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level
- Compatible with different types of Li-ion and Ni-MH / Ni-Cd batteries
- AC and DC charging modes
- Input: AC100-240V/50-60Hz/0.35A (max) or DC12-24V/1A (max)
- Output: Li-ion battery 4.2V, 1.0A, Ni-MH / Ni-Cd battery 1.5V, 1.0A
- Rated output power: 6W (Ni-MH/ Ni-Cd), 16.8W (Li-ion)
- Built-in short circuit protection, over current protection, over voltage protection and reverse polarity protection



## Dual Channel Smart Charger (ARE-C1+ )

Fenix ARE-C1+ is a dual channel smart charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level
- Compatible with different types of Li-ion and Ni-MH / Ni-Cd batteries
- AC and DC charging modes
- Input: AC100-240V/50-60Hz/0.35A (max) or DC12-24V/1A (max)
- Output: Li-ion battery 4.2V, 1.0A, Ni-MH / Ni-Cd battery 1.5V, 1.0A
- Rated output power: 3W (Ni-MH/ Ni-Cd), 8.4W (Li-ion)
- Built-in short-circuit protection, over-current protection, over-voltage protection and reverse polarity protection



## Single Channel Smart Charger (ARE-X1)

The Fenix ARE-X1 is a single channel smart charger designed for 18650 and 26650 batteries, and provides charging, discharging and battery power detection.

- Compatible with one 18650 or one 26650 rechargeable Li-ion battery
- Supports micro USB charging and USB discharging
- LED charging/discharging indicator
- LED battery power detection
- Microcomputer chip controlled, digitally regulated charging to extend battery lifetime
- Short circuit, overcurrent, overvoltage and reverse polarity protection



## Dual Channel Smart Charger (ARE-X2)

The Fenix ARE-X2 dual channel smart charger chooses the correct charging current for each battery inserted, for any battery between the 26650 and 10440. It also features micro USB charging and discharging, and LED charging/discharging indicators clearly inform you of the charging status.

- Compatible types of batteries
- Able to charge identical or different batteries sizes simultaneously
- Micro USB charging/USB discharging
- Be able to charge same kind or different kinds of batteries simultaneously
- Micro USB battery charging, USB battery discharging
- Chooses corresponding charging mode depending on each type of battery
- Built-in circuit protects batteries against overcharging, over-discharging, short circuiting and improper battery insertion
- LED charging/discharging indicators



## TK75 Extended Runtime Kit (AET-TK75)

The runtime of the TK75 can be extended with the addition of body tube segments and battery holders. Each segment added extends the runtime equal to the runtime of one TK75.

- Install the kit facing the right direction
- Runtime equal to the runtime of one TK75 is gained with the addition of each extended runtime kit
- The use of more than three kits in one TK75 flashlight is not recommended



## Single Channel Smart Charger (ARE-X1+ )

Fenix ARE-X1+, the single channel smart battery charger, is built for different sizes of rechargeable Li-ion batteries, as well as Ni-MH and Ni-Cd batteries. In addition, the Micro USB charging port offers versatile universality. While charging, the user-friendly LCD screen indicates the battery level and charging status clearly. Built-in multi-protection guarantees charging safety.

- Compatible with different battery types
- Micro USB charging port
- LCD screen for displaying battery level and charging status
- Multi-protection circuits



## Solar power charger(ARS-11 )

- Eight American SUNPOWER solar panels
- USB port, max 5V/0.5A
- Desert digital camouflage 900D antique nylon fabric
- Mobile phone bag, portable hanging buckle
- Rated power: 12W
- Size: 138\*78\*40mm (Length\*Width\*Thickness)
- Weight: 380 grams

NEW



ACCESSORIES COMPATIBILITY GUIDE

| MODEL       | Filter Adapter |    |   |   | Diffuser Tip |   |   | Traffic Wand |   |   | Battery |            |    |     | Remote Switch |       | Rail Mount |    | Bike Mount | MODEL     |             |
|-------------|----------------|----|---|---|--------------|---|---|--------------|---|---|---------|------------|----|-----|---------------|-------|------------|----|------------|-----------|-------------|
|             | AOF            |    |   |   | AOD          |   |   | AOT          |   |   | ARB     |            |    |     | AER           |       | ALG        |    | ALB        |           |             |
|             | S              | S+ | M | L | S            | M | L | S            | M | L | L14     | L14/USBL16 | L2 | L18 | L18/USBL4     | 01/02 | 03         | 01 | 00         |           | 10          |
| TK-SERIES   |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            | TK-SERIES |             |
| TK75 2018   |                |    |   |   |              |   |   |              |   |   |         | ✓          | ✓  |     |               |       |            |    |            |           | TK75 2018   |
| TK72R       |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK72R       |
| TK65R       |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK65R       |
| TK47        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK47        |
| TK47UE      |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK47UE      |
| TK35 2018   |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK35 2018   |
| TK35UE 2018 |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK35UE 2018 |
| TK32        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK32        |
| TK25IR      | ✓              | ✓  |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK25IR      |
| TK25R&B     | ✓              | ✓  |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK25R&B     |
| TK25Red     | ✓              | ✓  |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK25Red     |
| TK20R       |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK20R       |
| TK16        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK16        |
| TK15UE      |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK15UE      |
| TK09        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | TK09        |
| PD-SERIES   |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | PD-SERIES   |
| PD40R       |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | PD40R       |
| PD35 TAC    | ✓              | ✓  |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | PD35 TAC    |
| PD35 V2.0   | ✓              | ✓  |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | PD35 V2.0   |
| PD32        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | PD32        |
| PD25        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | PD25        |
| LD-SERIES   |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | LD-SERIES   |
| LD75C       |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | LD75C       |
| LD41        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | LD41        |
| LD22        | ✓              | ✓  |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | LD22        |
| LD12        | ✓              | ✓  |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | LD12        |
| LD09        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | LD09        |
| LD02        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | LD02        |
| E-SERIES    |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | E-SERIES    |
| E35UE       |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | E35UE       |
| E25UE       | ✓              | ✓  |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | E25UE       |
| E20         | ✓              | ✓  |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | E20         |
| E15         |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | E15         |
| E12         |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | E12         |
| E05         |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | E05         |
| E01         |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | E01         |
| MC-SERIES   |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | MC-SERIES   |
| MC11        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | MC11        |
| FD-SERIES   |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | FD-SERIES   |
| FD65        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | FD65        |
| FD45        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | FD45        |
| FD41        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | FD41        |
| FD30        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | FD30        |
| FD20        | ✓              | ✓  |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | FD20        |
| RC-SERIES   |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | RC-SERIES   |
| RC40        |                |    |   |   |              |   |   |              |   |   |         |            |    |     |               |       |            |    |            |           | RC40        |

| MODEL        | Filter Adapter |    |   |   | Diffuser Tip |   |   | Traffic Wand |   |   | Battery |         |     |    | Remote Switch |         | Rail Mount |       | Bike Mount | MODEL |    |    |              |
|--------------|----------------|----|---|---|--------------|---|---|--------------|---|---|---------|---------|-----|----|---------------|---------|------------|-------|------------|-------|----|----|--------------|
|              | AOF            |    |   |   | AOD          |   |   | AOT          |   |   | ARB     |         |     |    | AER           |         | ALG        |       | ALB        |       |    |    |              |
|              | S              | S+ | M | L | S            | M | L | S            | M | L | L14     | L14/USB | L16 | L2 | L18           | L18/USB | L4         | 01/02 | 03         |       | 01 | 00 | 10           |
| RC20         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | RC20         |
| RC11         | ✓              |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | RC11         |
| RC09         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | RC09         |
| RC05         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | RC05         |
| UC52         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | UC52         |
| UC35         | ✓              |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | UC35         |
| UC30         | ✓              |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | UC30         |
| UC09         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | UC09         |
| UC02         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | UC02         |
| UC02SS       |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | UC02SS       |
| UC01         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | UC01         |
| SD-SERIES    |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | SD-SERIES    |
| SD20         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | SD20         |
| SD11         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | SD11         |
| SE-SERIES    |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | SE-SERIES    |
| SE10         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | SE10         |
| HP-SERIES    |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HP-SERIES    |
| HP30R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HP30R        |
| HP25R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HP25R        |
| HP15UE       |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HP15UE       |
| HM-SERIES    |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HM-SERIES    |
| HM50R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HM50R        |
| HL60R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL60R        |
| HL55         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL55         |
| HL23         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL23         |
| HL-SERIES    |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL-SERIES    |
| HL40R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL40R        |
| HL32R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL32R        |
| HL30 2018    |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL30 2018    |
| HL26R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL26R        |
| HL16         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL16         |
| HL15         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL15         |
| HL12R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL12R        |
| HL10         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | HL10         |
| BIKE LIGHT   |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | BIKE LIGHT   |
| BC30R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | BC30R        |
| BC30         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | BC30         |
| BT30R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | BT30R        |
| BC21R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | BC21R        |
| CAMP LANTERN |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | CAMP LANTERN |
| CL30R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | CL30R        |
| CL25R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | CL25R        |
| CL20R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | CL20R        |
| CL09         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | CL09         |
| CL05         |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | CL05         |
| CP30R        |                |    |   |   |              |   |   |              |   |   |         |         |     |    |               |         |            |       |            |       |    |    | CP30R        |

NOTE:  
 \* Only for ON/OFF operation.  
 \*\* Press down the anode side when taking out the battery in case the battery's anode stuck in the battery holder.

| MODEL       | LED                           | Max output  | Max runtime | Brightness level    | IP rating | Dimension         | Weight | Battery                            | MODEL       |
|-------------|-------------------------------|-------------|-------------|---------------------|-----------|-------------------|--------|------------------------------------|-------------|
| TK-SERIES   |                               |             |             |                     |           |                   |        |                                    | TK-SERIES   |
| Tk75 2018   | Cree XHP35 HI                 | 5100 lumens | 95h         | 6 output levels     | IP68      | 188×53×86mm       | 630g   | 4*18650                            | TK75 2018   |
| TK72R       | XHP70                         | 9000 lumens | 88h         | Stepless regulation | IP68      | 156×64×50.5mm     | 420g   | 14000mAh rechargeable battery pack | TK72R       |
| TK65R       | Cree XHP70                    | 3200 lumens | 113h        | 5 output levels     | IP68      | 270.5×61.5×36.5mm | 418g   | 10000mAh rechargeable battery pack | TK65R       |
| TK47        | Cree XHP35 HI                 | 1300 lumens | 220h        | 6 output levels     | IP68      | 266.2×61.5×28.6mm | 376g   | 2*18650                            | TK47        |
| TK47UE      | Cree XHP70                    | 3200 lumens | 170h        | 7 output levels     | IP68      | 266.2×61.5×28.6mm | 365g   | 2*18650                            | TK47UE      |
| TK35 2018   | Cree XHP35 HI(Neutral white)  | 1300 lumens | 235h        | 5 output levels     | IP68      | 159.5×43×48mm     | 271g   | 2*18650                            | TK35 2018   |
| TK35UE 2018 | Cree XHP 70                   | 3200 lumens | 152h        | 6 output levels     | IP68      | 164.5×48×43mm     | 286g   | 2*18650                            | TK35UE 2018 |
| TK32        | Cree XP-L HI V3               | 1000 lumens | 170h        | 8 output levels     | IP68      | 159x25x52mm       | 175g   | 2*CR123A/1*18650                   | TK32        |
| TK25 IR     | Cree XP-G2 S3 LED's           | 1000 lumens | 110h        | 6 output levels     | IP68      | 142.6x25.4x40mm   | 175g   | 2*CR123A/1*18650                   | TK25 IR     |
| TK25 R&B    | Cree XP-G2 S3 LED's&XP-E2 LED | 1000 lumens | 110h        | 7 output levels     | IP68      | 142.6x25.4x40mm   | 156.5g | 2*CR123A/1*18650                   | TK25 R&B    |
| TK25 Red    | Cree XP-G2 S3 LED's&XP-E2 LED | 1000 lumens | 110h        | 7 output levels     | IP68      | 142.6x25.4x40mm   | 156.5g | 2*CR123A/1*18650                   | TK25 Red    |
| TK20R       | Cree XP-L HI V3               | 1000 lumens | 160h        | 4 output levels     | IP68      | 151.5×25×34mm     | 141g   | 2*CR123A/1*18650                   | TK20R       |
| TK16        | Cree XM-L2 U2                 | 1000 lumens | 150h        | 4 output levels     | IP68      | 140×25×34mm       | 122g   | 2*CR123A/1*18650                   | TK16        |
| TK15UE      | Cree XPL HI V3                | 1000 lumens | 135h        | 4 output levels     | IP68      | 142.5x 25.4x34mm  | 141g   | 2*CR123A/1*18650                   | TK15UE      |
| TK09        | Cree XP-L HI                  | 900 lumens  | 37h         | 3 output levels     | IP68      | 130×25.4×34mm     | 105g   | 2*CR123A/1*18650                   | TK09        |
| PD-SERIES   |                               |             |             |                     |           |                   |        |                                    | PD-SERIES   |
| PD40R       | Cree XHP70                    | 3000 lumens | 55h         | 5 output levels     | IP68      | 138.5×34×30mm     | 126g   | 26650 rechargeable power battery   | PD40R       |
| PD35 TAC    | Cree XP-L V5                  | 1000 lumens | 140h        | 5 output levels     | IP68      | 137×25.4mm        | 89g    | 2*CR123A/1*18650                   | PD35 TAC    |
| PD35 V2.0   | Cree XP-L HI                  | 1000 lumens | 430h        | 5 output levels     | IP68      | 138×23x25.4mm     | 88g    | 2*CR123A/1*18650                   | PD35 V2.0   |
| PD32        | Cree XP-L HI                  | 900 lumens  | 240h        | 5 output levels     | IP68      | 129.5×22.6×24mm   | 77g    | 2*CR123A/1*18650                   | PD32        |
| PD25        | Cree XP-L V5                  | 550 lumens  | 100h        | 4 output levels     | IP68      | 93×21.5mm         | 47g    | 1*16340/1*CR123A                   | PD25        |
| LD-SERIES   |                               |             |             |                     |           |                   |        |                                    | LD-SERIES   |
| LD75C       | Cree XM-L2 U2 & XM-L color    | 4200 lumens | 175h        | 9 output levels     | IP68      | 158×52×74mm       | 430g   | 4*18650/8*CR123A                   | LD75C       |
| LD41        | Cree XM-L2 U2                 | 960 lumens  | 200h        | 4 output levels     | IP68      | 175×40mm          | 190g   | 4*AA                               | LD41        |
| LD22        | Cree XP-G2 R5                 | 300 lumens  | 100h        | 4 output levels     | IP68      | 155×215mm         | 72g    | 2*AA                               | LD22        |
| LD12        | Cree XP-G2 R5 (Neutral white) | 320 lumens  | 60h         | 4 output levels     | IP68      | 102.5×21.5×20.5mm | 56g    | 1*14500/1*AA                       | LD12        |
| LD09        | Cree XP-E2 R3                 | 220 lumens  | 58h         | 3 output levels     | IP68      | 94×19mm           | 35g    | 1*14500/1*AA                       | LD09        |
| LD02        | Cree XP-E2                    | 100 lumens  | 15h         | 3 output levels     | IP68      | 76×15mm           | 16g    | 1*AAA                              | LD02        |
| E-SERIES    |                               |             |             |                     |           |                   |        |                                    | E-SERIES    |
| E35UE       | Cree XM-L2 U2                 | 1000 lumens | 150小时       | 5 output levels     | IP68      | 122×24mm          | 72g    | 2*CR123A/1*18650                   | E35UE       |
| E25UE       | Cree XP-L V5                  | 1000 lumens | 100小时       | 5 output levels     | IP68      | 161×19.6×25.4mm   | 87g    | 2*14500/2*AA                       | E25UE       |
| E20         | Cree XP-E2                    | 265 lumens  | 75小时        | 4 output levels     | IP68      | 154×21×25.4mm     | 90g    | 2*AA                               | E20         |
| E15         | Cree XP-G2 R5                 | 450 lumens  | 72小时        | 4 output levels     | IP68      | 64.8×19×22mm      | 29g    | 1*16340/1*CR123A                   | E15         |
| E12         | Cree XP-E                     | 130 lumens  | 36小时        | 3 output levels     | IP68      | 90×19mm           | 28.5g  | 1*AA                               | E12         |
| E05         | Cree XP-E2                    | 85 lumens   | 15小时        | 3 output levels     | IP68      | 66.5×15mm         | 12.5g  | 1*AAA                              | E05         |
| E01         | Nichia                        | 13 lumens   | 16小时30分     | 1 output levels     | IP68      | 71×14.2mm         | 14g    | 1*AAA                              | E01         |

| MODEL               | LED                                    | Max output  | Max runtime | Brightness level | IP rating       | Dimension            | Weight | Battery                           | MODEL  |
|---------------------|--|-------------|-------------|------------------|-----------------|----------------------|--------|-----------------------------------|--------|
| <b>MC-SERIES</b>    |  |             |             |                  |                 |                      |        |                                   |        |
| MC11                | Cree XP-G2 R5                          | 155 lumens  | 100h        | 3 output levels  | IP68            | 99×21.5×25mm         | 64.8g  | 1*AA                              | MC11   |
| <b>FD-SERIES</b>    |  |             |             |                  |                 |                      |        |                                   |        |
| FD65                | Cree XHP35 HI LED(Neutral white)       | 3800 lumens | 86h         | 5 output levels  | IP68            | 152.5×50.5×61mm      | 431g   | 4*18650                           | FD65   |
| FD45                | Cree XP-L HI (Neutral white)           | 900 lumens  | 160h        | 5 output levels  | IP68            | 121.2×39×40mm        | 208g   | 4*AA                              | FD45   |
| FD41                | Cree XP-L HI                           | 900 lumens  | 150h        | 4 output levels  | IP68            | 146×25.4×40mm        | 160g   | 2*CR123A/1*18650                  | FD41   |
| FD30                | Cree XP-L HI                           | 900 lumens  | 170h        | 5 output levels  | IP68            | 140.5×23×25.4mm      | 96g    | 2*CR123A/1*18650                  | FD30   |
| FD20                | Cree XP-G2 S3 LED                      | 350 lumens  | 80h         | 4 output levels  | IP68            | 153.2×20×25.4mm      | 87g    | 2*AA                              | FD20   |
| <b>SE-SERIES</b>    |  |             |             |                  |                 |                      |        |                                   |        |
| SE10                | Cree XP-E2 R3 LED                      | 100 lumens  | 2h50min     | 1 output levels  | IP68            | 177.5×53×51mm        | 164g   | 3*AA                              | SE10   |
| <b>RC/UC-SERIES</b> |  |             |             |                  |                 |                      |        |                                   |        |
| RC40                | Cree XM-L2 U2                          | 6000 lumens | 125h        | 5 output levels  | IP68            | 272×52×108mm         | 1234g  | 7800mAh/7.4v rechargeable battery | RC40   |
| RC20                | Cree XM-L2 U2                          | 1000 lumens | 120h        | 4 output levels  | IP68            | 161×25.4×40mm        | 205g   | 2600mAh/3.7v rechargeable battery | RC20   |
| RC11                | Cree XM-L2 U2                          | 1000 lumens | 150h        | 5 output levels  | IP68            | 115.5×23×25.4mm      | 69g    | 1*18650/2*CR123A                  | RC11   |
| RC09                | Cree XM-L2 U2                          | 550 lumens  | 56h         | 4 output levels  | IP68            | 72×21.5mm            | 45g    | 1*16340/1*CR123A                  | RC09   |
| RC05                | Cree XP-G2 R5                          | 300 lumens  | 40h         | 4 output levels  | IP68            | 94×19mm              | 36.8g  | 1*14500/1*AA                      | RC05   |
| UC52                | CREE XHP70 LED                         | 3000 lumens | 80h         | 5 output levels  | IP68            | 153.5×42×25.9mm      | 276g   | Built-in 7000mAh Li-ion battery   | UC52   |
| UC35                | Cree XM-L2 U2                          | 960 lumens  | 150h        | 5 output levels  | IP68            | 150×25.4mm           | 99g    | 1*18650/2*CR123A                  | UC35   |
| UC30                | Cree XP-L HI                           | 1000 lumens | 150h        | 5 output levels  | IP68            | 130×25.4×23.4mm      | 77g    | 1*18650/2*CR123A                  | UC30   |
| UC09                | Cree XP-G3 neutral white LED           | 500 lumens  | 150h        | 6 output levels  | IP68            | 70×19mm              | 39g    | 1*16340/1*CR123A                  | UC09   |
| UC02                | Cree XP-G2 S2                          | 130 lumens  | 3h50m       | 2 output levels  | IP68            | 43.2×4mm             | 8g     | 1*10180                           | UC02   |
| UC02SS              | Cree XP-G2 S2                          | 130 lumens  | 3h50m       | 2 output levels  | IP68            | 43.2×14mm            | 18.4g  | 1*10180                           | UC02SS |
| UC01                | Nichia                                 | 45 lumens   | 50h         | 3 output levels  | IPX6            | 62×22.5×10mm         | 13g    | Built-in Li-polymer battery       | UC01   |
| <b>SD-SERIES</b>    |  |             |             |                  |                 |                      |        |                                   |        |
| SD20                | Cree XM-L2 U2 & Cree XQE Red           | 1000 lumens | 7h30m       | 3 output levels  | underwater 100m | 208×26×40mm          | 245g   | 4*CR123A/2*18650                  | SD20   |
| SD11                | Cree XM-L2 U2 (Neutral white)          | 1000 lumens | 3h40m       | 3 output levels  | underwater 100m | 138×26×34mm          | 132.5g | 2*CR123A/1*18650                  | SD11   |
| <b>HP-SERIES</b>    |  |             |             |                  |                 |                      |        |                                   |        |
| HP30R               | Cree XM-L2&XP-G2 R5 LED(Neutral white) | 1750 lumens | 400h        | 8 output levels  | IP66            | 77×52×34mm           | 285g   | 2*18650/4*CR123A                  | HP30R  |
| HP25R               | Cree XM-L2 U2 & XP-G2 R5               | 1000 lumens | 150h        | 8 output levels  | IP66            | 60×54×32.5mm         | 183.5g | 1*18650/2*CR123A                  | HP25R  |
| HP15UE              | Cree XM-L2                             | 900 lumens  | 170h        | 5 output levels  | IP66            | 67.4 × 55.9 × 34.7mm | 154.2g | 4*AA                              | HP15UE |

| MODEL        | LED                                | Max output  | Max runtime | Brightness level | IP rating | Dimension           | Weight | Battery   | MODEL        |
|--------------|------------------------------------|-------------|-------------|------------------|-----------|---------------------|--------|---|--------------|
| HM-SERIES    |                                    |             |             |                  |           |                     |        |   | HM-SERIES    |
| HM50R        | Cree XM-L2 U2                      | 500 lumens  | 128h        | 4 output levels  | IP68      | 67.5×33×28mm        | 63g    | 1*16340/1*CR123A                                | HM50R        |
| HL60R        | Cree XM-L2 U2 (Neutral white)      | 950 lumens  | 100h        | 6 output levels  | IP68      | 87×46×51mm          | 121g   | 1*18650/2*CR123A                                | HL60R        |
| HL55         | Cree XM-L2 U2 (Neutral white)      | 900 lumens  | 100h        | 5 output levels  | IP68      | 84 × 46 × 48mm      | 115g   | 2*CR123A/1*18650                                | HL55         |
| HL23         | Cree XP-G2 R5                      | 150 lumens  | 110h        | 3 output levels  | IP68      | 71 × 38.9 × 40mm    | 52g    | 1*AA  | HL23         |
| HL-SERIES    |                                    |             |             |                  |           |                     |        |   | HL-SERIES    |
| HL40R        | Cree XP-G3 S4                      | 600 lumens  | 200h        | 6 output levels  | IP66      | 68 × 54 × 42mm      | 130g   | Built-in 2000mAh Li-ion battery                 | HL40R        |
| HL32R        | Cree XP-G3 S3                      | 600 lumens  | 200h        | 7 output levels  | IP66      | 64 × 46 × 37.5mm    | 108g   | Built-in 2000mAh Li-ion battery                 | HL32R        |
| HL30 2018    | Cree XP-G3 S3                      | 300 lumens  | 200h        | 6 output levels  | IP66      | 64 × 50 × 38mm      | 73.5g  | 2*AA  | HL30 2018    |
| HL26R        | Cree XP-G2 R5                      | 450 lumens  | 150h        | 6 output levels  | IP66      | 65×44×37mm          | 86g    | Built-in 1600mAh Li-ion battery                 | HL26R        |
| HL16         | Cree XP-E2 R3 LED(Neutral white)   | 70 lumens   | 85h         | 4 output levels  | IP66      | 62 × 39.5 × 37mm    | 420g   | 1*AA  | HL16         |
| HL15         | Cree XP-G2 R5 (Neutral white)      | 200 lumens  | 85h         | 5 output levels  | IP67      | 63 × 41.5 × 35mm    | 60g    | 1*AAA   | HL15         |
| HL12R        | Cree XP-G2 R5 (Neutral white)      | 400 lumens  | 110h        | 6 output levels  | IP66      | 56 × 40 × 31.9mm    | 73.3g  | Built-in1000mAh Li-polymer battery              | HL12R        |
| HL10         | Philips LXZ2-5770                  | 70 lumens   | 26h         | 3 output levels  | IP68      | 70×25×23mm          | 33g    | 1*AAA   | HL10         |
| HL05         | Imported Premium LED               | 8 lumens    | 260h        | 3 output levels  | IP68      | 36 × 38 × 18mm      | 13g    | 2*CR2032  | HL05         |
| BIKE LIGHT   |                                    |             |             |                  |           |                     |        |   | BIKE LIGHT   |
| BC30R        | Cree XM-L2 U2 (Neutral white)      | 1800 lumens | 36h         | 5 output levels  | IP66      | 114 × 50.5 × 31.8mm | 420g   | Built-in 5200mAh/3.7V rechargeable battery pack | BC30R        |
| BC30         | Cree XM-L2 T6                      | 1800 lumens | 20h         | 5 output levels  | IP66      | 126.7 × 50 × 31.8mm | 161g   | 2*18650/4*CR123A                                | BC30         |
| BT30R        | Cree XM-L2 T6 (Neutral white)      | 1800 lumens | 22h35m      | 5 output levels  | IP66      | 74×50.6×43.5mm      | 147g   | 2600mAh/7.4v rechargeable battery pack          | BT30R        |
| BC21R        | Cree XM-L2 T6 (Neutral white)      | 880 lumens  | 15h50m      | 4 output levels  | IP66      | 113×40.5×42mm       | 67g    | 1*18650/2*CR123A                                | BC21R        |
| CAMP LANTERN |                                    |             |             |                  |           |                     |        |   | CAMP LANTERN |
| CP30R        | Imported Premium Neutral White LED | 400 lumens  | 130h        | 4 output levels  | IP68      | 72 × 72 × 122.5mm   | 550g   | Built-in 10000mAh Li-polymer battery            | CP30R        |
| CL30R        | Imported Premium Neutral White LED | 650 lumens  | 350h        | 5 output levels  | IP67      | 93 × 93 × 136mm     | 412g   | 3*18650/6*CR123A                                | CL30R        |
| CL25R        | Imported Premium Neutral White LED | 350 lumens  | 1000h       | 5 output levels  | IP66      | 52 × 52 × 99mm      | 130g   | 1*18650/2*CR123A                                | CL25R        |
| CL20R        | Imported Premium Neutral White LED | 300 lumens  | 160h        | 4 output levels  | IP66      | 72.5 × 41× 51mm     | 90g    | Built-in 1600mAh Li-ion battery                 | CL20R        |
| CL09         | Imported Premium Neutral White LED | 200 lumens  | 150h        | 6 output levels  | IP68      | 78.5×22mm           | 31.5g  | 1*16340/1*CR123A                                | CL09         |

# CUSTOMER SERVICE

Fenix will exert every effort possible to make the service experience for our consumers as memorable, painless and cheerful as possible.

Fenix is concerned about your problems and difficulties when you are using our products, and we will try our best to provide excellent all-round service and support to you via our official website, Customer Service e-mail service and our survey questionnaire.

## Fenix Product Warranty Terms

### 1. Service Principle

a) Fenix provides easy, reliable, speedy service to all lights under our warranty.

b) Dealers will be responsible for customers' complaints. Customers should contact the dealer/distributor from where they bought their Fenix lights, for warranty support, with their Fenixlight Limited's "Warranty Card", or a trade invoice or receipt. Fenix will provide our authorized dealers with the necessary technology and parts to service/repair our lights.

### 2. Warranty Details

a) 15 days free replacement. Fenix will replace a new product if within 15 days of purchase, any manufacturing defect causes a malfunction during normal use, with the same model. If the model has been discontinued, customer will receive a model with similar specifications, or an improved model.

b) 5 years free repairs. Fenix offers free repairs for lights for 5 years after date of purchase, if a problem occurs during normal use. Different warranty period for different products:

| Type  | Warranty                                |
|---|---|
| Flashlight, headlamp, bicycle light and camping lantern (including rechargeable lights but not with built-in battery) | 5 years (rechargeable battery excluded) |
| Flashlight, headlamp, bike light and camping lantern (with built-in battery)  | 2 years (battery included)              |
| Rechargeable battery, battery charger, bike mount and remote pressure switch  | 1 year                                  |

Fenix products and free offers, except for these listed above, are not covered under the Fenix product warranty.

c) Limited Lifetime Warranty. For light repairs after expiration of the 5 year free repair warranty period, your light will be repaired but you will be charged for parts. The distributor will provide you with a quote before repairs.

d) Extended Warranty Service. Fenix recommends that customers register their products with the serial number on the official Fenix website: [www.fenixlight.com](http://www.fenixlight.com). Upon successful registration customers will receive an extra six (6) months warranty service.

e) Warranty Certificate. Customers requesting aftersales service from Fenix distributors or dealers, should present their completed Fenix Warranty Card, purchase invoice or receipt. The distributor should then provide service to the customer/s, and Fenix will support backup for this service.

f) The free warranty does not cover any damage or failure caused by:


i. Normal wear and tear;

ii. Rough operation;

iii. Battery leakage;

iv. Any defect or damage caused by improper operation, including but not limited to, operation which does not comply with the warranty or operator's manual specifications, e.g. if the operator's manual warns you against disassembling the flashlight head, doing so may damage the flashlight head and will void the warranty.

v. Any damage or defect caused by behavior beyond Fenix's control.

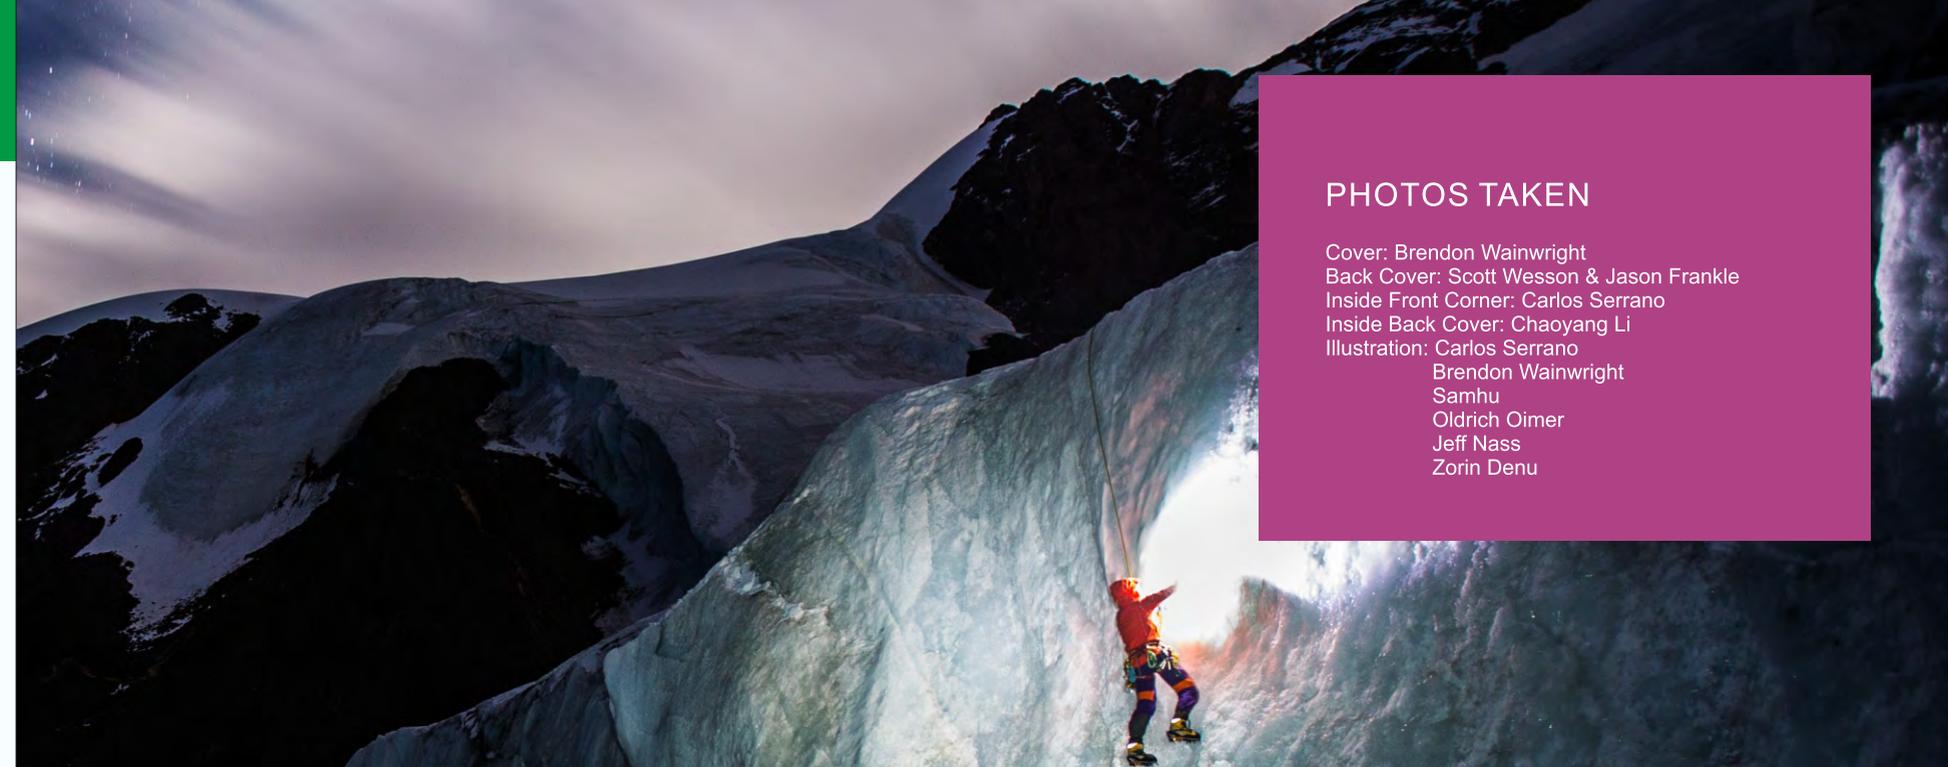

## PHOTOS TAKEN

Cover: Brendon Wainwright  
Back Cover: Scott Wesson & Jason Frankle  
Inside Front Corner: Carlos Serrano  
Inside Back Cover: Chaoyang Li  
Illustration: Carlos Serrano  
Brendon Wainwright  
Samhu  
Oldrich Oimer  
Jeff Nass  
Zorin Denu

g) To claim against your product warranty, contact our warranty service department with the following information:

i. Name;

ii. Type and model of product claimed for;

iii. Serial number;

iv. Age of the product;

v. Description of the problem.

NOTE: This new policy is only valid for flashlights purchased since 01 January 2015.

**For any problems/suggestions, please email our Customer Service Department:**

**[service@fenixlight.com](mailto:service@fenixlight.com) (Europe/America regions)**

**[service\\_1@fenixlight.com](mailto:service_1@fenixlight.com) (Asia/Oceania/Africa regions)**

**Tel: +86 400 8866 093**

**+86 755 2963 1193**

The terms of the warranty is subject to change without prior notice. For the latest version, please refer to Fenix's website: [www.fenixlight.com](http://www.fenixlight.com). Fenix reserves the rights of modification and final interpretation of these warranty terms.